



Fall 2016 & Spring 2017 360 Y-DROP™ Technical Guide



Issued September 6, 2016

360 Y-DROP™ Ordering Steps


These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



Order a 360 Y-DROP™ System

STEP 1 - Sprayer Mount Package (SMP)

- **The Sprayer Mount Package (SMP) is a pre-packaged set of parts sold by 360 Yield Center to attach the Y-DROP boom assembly to the sprayer manufacturer's boom. The SMP includes boom mounting brackets, top bracket plates, extension brackets, connectors, Y-drop boom assemblies, and any other hardware to complete an install. Every SMP has differing brackets, hardware, and kits as well as the correct number of such parts. 360 Yield Center will ensure your ordered package includes all parts necessary for a successful mount.**

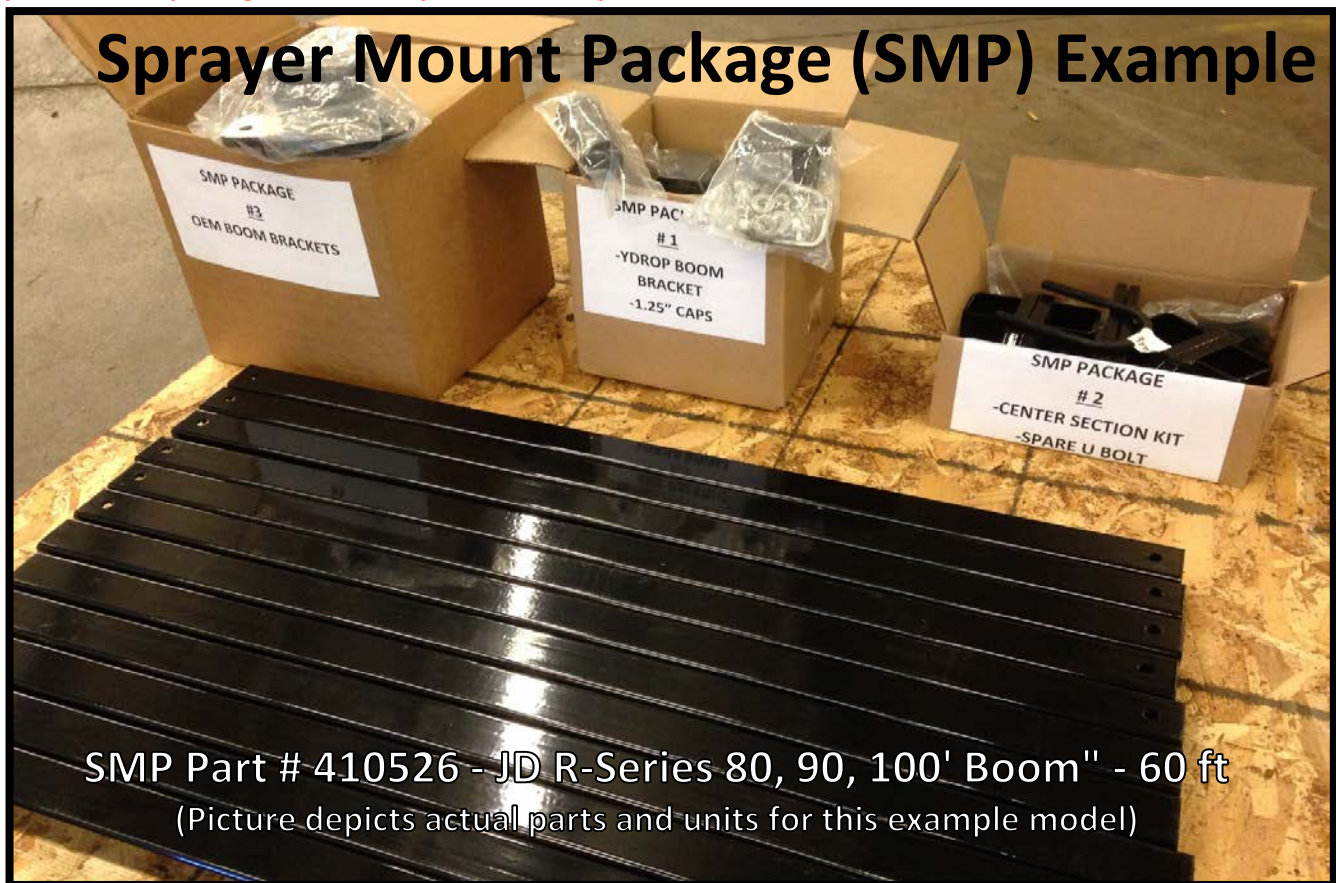

- **Appendix A** (of the Technical guide) provides charts to be used in determining the correct system boom length. Simply find your model, # of rows, and row width (while considering the 1st fold boom size) which will provide you the correct boom length to find your OEM sprayer.
- Find the resulting system boom length in the Price Guide Sprayer Mount Package listing with applicable part number - all hardware and mounting part quantities are all included in a single SMP.
- Reminder: 360 Y-DROP™ Systems Can ONLY be Mounted on the 1st fold of any self-propelled sprayer.
- If a 44' boom span is desired (22" spacing, 24 rows), a 40 ft SMP is recommended. For those who want to strengthen the 40' SMP for optimal performance over 23 drops, see **Appendix D** of this guide for additional components recommended.

360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



Order a 360 Y-DROP™ System

STEP 1 Continued - Sprayer Mount Package (SMP)

- ▶ The 360 Y-DROP™ System's boom assembly comes in 5 foot sections that connect together with 8" connectors and hardware. The boom assembly provides a consistent boom for the attachment of the riser mounts. It takes several boom assemblies to fit the entire length of the OEM sprayer boom as noted below. Boom assemblies are now included in the SMP. You no longer need to order boom assemblies separately.



- ▶ To assist in reducing interference during transportation, several riser mount assemblies (depending on boom length) are included in the SMP. You no longer need to order riser mount assemblies for transport as a separate step.



STEP 2 - Breakaway Assemblies - One Piece

- ▶ Breakaway assembly provides the linkage between the Y-Drop Boom and the riser tube that will allow for the entire YDROP unit to breakaway in those cases where the YDROP base unit will come into contact with the ground. This will allow for reduced stress on the Sprayer Mount Package and booms. The new One Piece design eliminates the need for Riser Mount Assemblies on each drop. You no longer need to order Riser Mount Assemblies as a separate step.
- ▶ Quantity Needed: # of drops
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 breakaway assemblies



360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.




Order a 360 Y-DROP™ System

STEP 3 - Riser Tubes

- **The Riser Tube is the long steel tube that attaches the 360 Y-DROP™ Base Unit to the system's Boom Assembly via the Riser Mount.**



- Quantity Needed: # of drops
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 riser tubes
- Note: Some sprayer models sit higher (or lower) in the center rows, requiring longer risers. It may be necessary to make a visual identification of the sprayer center to determine potential variability in riser sizes on the center section of the sprayer versus the outer boom heights. Refer to the chart on the next page for recommended riser lengths by sprayer model. See picture below:

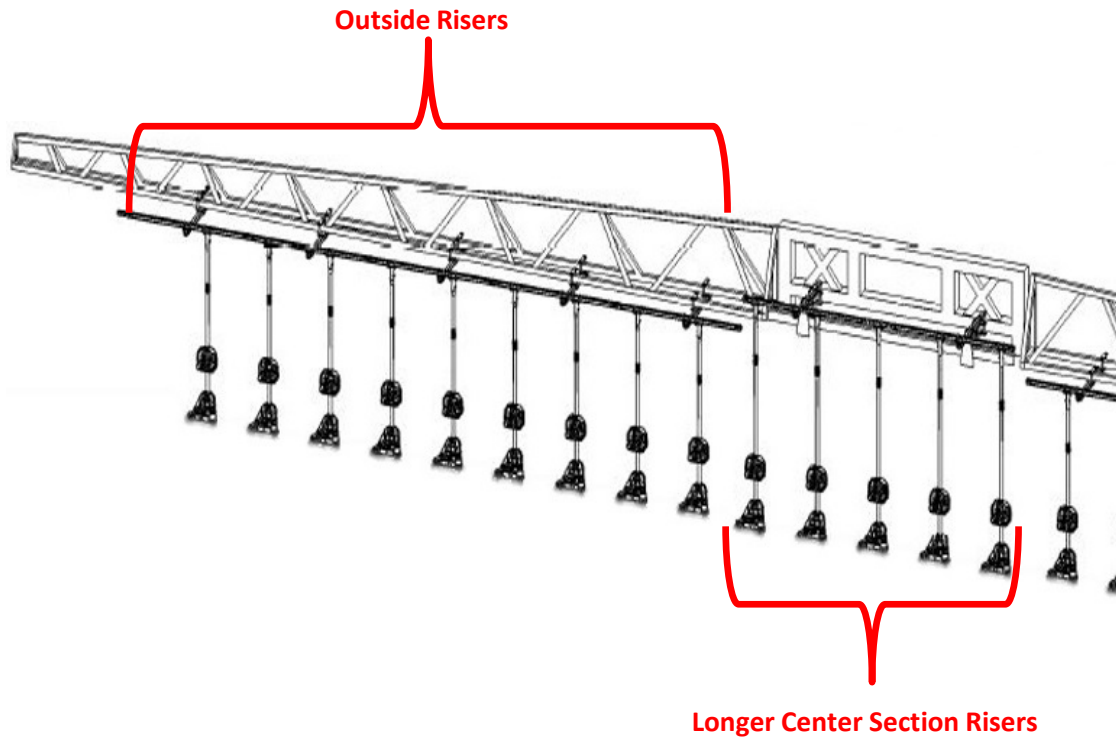

360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



Order a 360 Y-DROP™ System

- The Riser length is measured from the boom to the top of the 360 Y-DROP™ base unit. See illustration below for actual riser measurements and lengths.

Actual Riser Measurements & Lengths



- See charts below for part numbers corresponding with Riser length, and recommended riser lengths by OEM maker.

Part Number	Riser Length
416043	43 Inch
416049	49 Inch
416055	55 Inch
416061	61 Inch
416067	67 Inch
416079	79 Inch
416085	85 Inch
416091	91 Inch

Recommended Riser Tubes		
	Outside	Center
Apache	49"	49"
Rogator	49"	49"
Case	49"	49"
JD-R Series	55"	67"
JD - 4830/4730/4720	67"	55"
JD - 4930/4940	55"	49"
JD - 4710	55"	49"
JD - 4630	49"	49"
Hagie DTS 2016+	67"	67"
Hagie DTS pre-2016	61"	61"
Hagie STS & Aluminum	67"	67"
Miller-pre 08	67"	67"
Miller-2008+	67"	85"

360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



Order a 360 Y-DROP™ System

STEP 4 - Riser Hose Assemblies

- ▶ **The Riser Hose Assembly is the hose that liquid flows through from the OEM Sprayer lines to the 360 Y-DROP™ Base Units.**



- ▶ Quantity Needed: # of drops
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 riser hose assemblies
- ▶ See chart below for the Riser Hoses corresponding with the Riser Tubes.

Riser Tube	Riser Hose Needed	Part Number
43" or 49"	90"	416090
55"	102"	416099
61" or 67"	114"	416110
79", 85" or 91"	126"	416111

- ▶ Each part number includes a single hose with required connectors.
- ▶ For Case AIM systems, order adapters (416005) for the hose connection to the nozzle body. One adapter is needed for each hose.

360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



Order a 360 Y-DROP™ System

STEP 5 - 360 Y-DROP™ Base Unit

- **The 360 Y-DROP™ Base Unit is the molded part at the bottom of the Riser Tube which runs through the field.**



- Quantity Needed: INSIDE ROWS: Conventional (Black): # of drops - 2
Quantity Needed: OUTSIDE ROWS: High Visibility (Orange): 2
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 drops.
24 row system = 21 360 Y-DROP™ Conventional Base Units
+ 2 360 Y-DROP™ High Visibility Base Units
= 23 Total Base Units
- See chart below for the 360 Y-DROP™ Base Unit part numbers.

Part Number	360 Y-DROP™ Base Unit
413000	360 Y-DROP™ Base Unit - Conventional (Black)
413010	360 Y-DROP™ Base Unit - High Visibility (Orange)

- Each part number includes a single 360 Y-DROP™ Base Unit.

360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



Order a 360 Y-DROP™ System

STEP 6 - Drag Hoses

- ▶ **Two Drag Hoses (order singly) attach to each 360 Y-DROP™ Base Unit and precisely apply the liquid nitrogen or other product along the base of the stalk.**



- ▶ Quantity Needed: # of drops * 2 hoses per 360 Y-DROP™.
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 drops * 2 = 46 drag hoses.
- ▶ See chart below for Drag Hoses offered for sale.

Part Number	Drag Hose Length
413124	24 Inch
413130	30 Inch
413136	36 Inch
413148	44 Inch

- ▶ Recommendation is that most systems will utilize the 30" hose.
- ▶ For Row widths greater than 30" or rough terrain, 36" drag hoses are suggested.
- ▶ Each part number includes a single drag hose and hose clamp.

360 Y-DROP™ Ordering Steps


These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



Order a 360 Y-DROP™ System

STEP 7 - Orifices/Nozzles (Optional)

- **Orifices or Nozzles are used in the base unit to control application rates during operation of the 360 Y-DROP™. Two orifices or nozzles are needed for each drop (one for each side or arm of the base unit).**

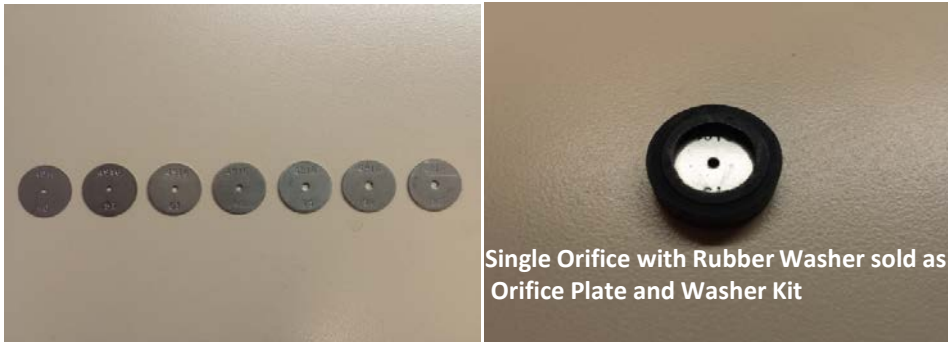

- Quantity needed: INSIDE ROWS: (# of drops * 2) - 2
Quantity needed: OUTSIDE ROWS: Two
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 drops * 2 = 46 total nozzles.
24 row system = (23 drops * 2) - 2 = 44 Inside orifices or nozzles
+ 2 Outside orifices or nozzles
= 46 Total orifices or nozzles
- See **Appendix C** for orifice selection based on targeted application rates and row spacing.
- See **Appendix C** or chart below for inside/outside row correlation for orifices. The outside orifice has a larger volume requirement due to outside rows being fed by one drag hose.

Double Rate Correlation Orifice Plate Sizes		
Inside Rows		Outside Rows
48	→	73
57	→	78
61	→	91
73	→	103
78	→	110
91	→	132

- If selecting Variable Rate Nozzles, refer to **Appendix B** for nozzle selection.
- After deciding on inside nozzle, reference chart below for corresponding outside nozzle. The outside nozzle has a larger volume requirement due to outside rows being fed by one drag house.

INSIDE Nozzle (Select in Appendix B)	OUTSIDE Nozzle (Selection Should Correspond to the Inside Nozzle as Below)
TDVREX015	TDVREX03
TDVREX02	TDVREX03
TDVREX03	TDVREX5

- Each part number includes a single orifice plate and corresponding rubber washer. In the case of variable rate nozzles, each part number includes a single variable rate nozzle.

Use Chart below to determine appropriate SMP part number for your make and model of sprayer.
All SMP part numbers begin with 410 _____. The final 3 part numbers are shown below in the chart.

Ex. The part number for a 60 ft JD 4830/4730/4720 SMP is 410506.

38	38	38	30	30	30	30	28	22	22	22	20	15	Spacing	
24	16	12	32	24	16	12	32	36	32	24	36	48	Rows	
76	51	38	80	60	40	30	75	66	59	44	60	60	Calculated Boom Feet	
70	60	40	70	60	40	30	70	70	60	40	60	60	Y-Drop Boom Category	
N/A	506	504	N/A	506	504	503	N/A	N/A	506	504	506	506	JD 4830/4730/4720	
517	516	514	517	516	514	513	517	517	516	514	516	516	JD 4930/4940	
N/A	686	684	N/A	686	684	683	N/A	N/A	686	684	686	686	JD 4710	
N/A	666	664	N/A	666	664	663	N/A	N/A	666	664	666	666	JD 4630	
N/A	526	524	N/A	526	524	523	N/A	527	526	524	526	526	JD R-Series 80, 90, 100' Boom	
537	536	534	537	536	534	533	537	537	536	534	536	536	JD R-Series 120' Booms	
N/A	546	544	N/A	546	544	543	N/A	547	546	544	546	546	Hagie STS Steel 80, 90, 100' Boom (2000-current)	
557	556	554	557	556	554	553	557	557	556	554	556	556	Hagie STS 120' Aluminum Boom (2012-current)	
N/A	N/A	654	N/A	N/A	654	653	N/A	N/A	N/A	N/A	N/A	N/A	Hagie DTS (pre-2016)	
N/A	636	634	N/A	636	634	633	N/A	N/A	636	634	636	636	Hagie DTS (2016+)	
N/A	566	564	N/A	566	564	563	N/A	567	566	564	566	566	Case IH 120' Boom	
N/A	576	574	N/A	576	574	573	N/A	577	576	574	576	576	Case IH 80'-90' Boom	
587	586	584	587	586	584	583	587	587	586	584	586	586	Miller Nitro (2008+)	
597	596	594	597	596	594	593	597	597	596	594	596	596	New Holland	
607	606	604	607	606	604	603	607	607	606	604	606	606	Miller Nitro (pre-2008)	
N/A	616	614	N/A	616	614	613	N/A	N/A	616	614	616	616	ROGATOR 80, 90, 100' Boom	
N/A	626	624	N/A	626	624	623	N/A	N/A	626	624	626	626	ROGATOR 120' Boom	
N/A	646	644	N/A	646	644	643	N/A	N/A	646	644	646	646	Apache 80, 90, 100' boom	
697	696	694	697	696	694	693	697	697	696	694	696	696	JD K&S Aluminum	
707	706	704	707	706	704	703	707	707	706	704	706	706	Hagie Delta	
N/A	716	714	N/A	716	714	713	N/A	N/A	716	714	716	716	New Holland Rear, Miller Condor	

30 Inch Corn All Recommendations based on Water Specific Gravity												
USE THIS CHART INSIDE NOZZLE SELECTION - 30 INCH CORN												
TDVRF 015		Application Rate GPA at MPH Based on 15" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow											
PSI	GPM	5	6	7	8	9	10	11	12	13	14	15
20	0.174	13.8	11.5	9.8	8.6	7.7	6.9	6.3	5.7	5.3	4.9	4.6
30	0.266	21.1	17.6	15.0	13.2	11.7	10.5	9.6	8.8	8.1	7.5	7.0
40	0.350	27.7	23.1	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2
50	0.391	31.0	25.8	22.1	19.4	17.2	15.5	14.1	12.9	11.9	11.1	10.3
60	0.443	35.1	29.2	25.1	21.9	19.5	17.5	15.9	14.6	13.5	12.5	11.7
70	0.483	38.3	31.9	27.3	23.9	21.3	19.1	17.4	15.9	14.7	13.7	12.8
80	0.516	40.9	34.1	29.2	25.5	22.7	20.4	18.6	17.0	15.7	14.6	13.6
90	0.537	42.5	35.4	30.4	26.6	23.6	21.3	19.3	17.7	16.4	15.2	14.2
100	0.566	44.8	37.4	32.0	28.0	24.9	22.4	20.4	18.7	17.2	16.0	14.9
120	0.620	49.1	40.9	35.1	30.7	27.3	24.6	22.3	20.5	18.9	17.5	16.4
140	0.670	53.1	44.2	37.9	33.2	29.5	26.5	24.1	22.1	20.4	19.0	17.7
TDVRF 02		Application Rate GPA at MPH Based on 15" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow											
PSI	GPM	5	6	7	8	9	10	11	12	13	14	15
20	0.251	19.9	16.6	14.2	12.4	11.0	9.9	9.0	8.3	7.6	7.1	6.6
30	0.384	30.4	25.3	21.7	19.0	16.9	15.2	13.8	12.7	11.7	10.9	10.1
40	0.512	40.6	33.8	29.0	25.3	22.5	20.3	18.4	16.9	15.6	14.5	13.5
50	0.575	45.5	38.0	32.5	28.5	25.3	22.8	20.7	19.0	17.5	16.3	15.2
60	0.653	51.7	43.1	36.9	32.3	28.7	25.9	23.5	21.5	19.9	18.5	17.2
70	0.696	55.1	45.9	39.4	34.5	30.6	27.6	25.1	23.0	21.2	19.7	18.4
80	0.744	58.9	49.1	42.1	36.8	32.7	29.5	26.8	24.6	22.7	21.0	19.6
90	0.779	61.7	51.4	44.1	38.6	34.3	30.8	28.0	25.7	23.7	22.0	20.6
100	0.821	65.0	54.2	46.4	40.6	36.1	32.5	29.6	27.1	25.0	23.2	21.7
120	0.900	71.3	59.4	50.9	44.6	39.6	35.6	32.4	29.7	27.4	25.5	23.8
140	0.972	77.0	64.2	55.0	48.1	42.8	38.5	35.0	32.1	29.6	27.5	25.7
TDVRF 03		Application Rate GPA at MPH Based on 15" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow											
PSI	GPM	5	6	7	8	9	10	11	12	13	14	15
20	0.326	25.8	21.5	18.4	16.1	14.3	12.9	11.7	10.8	9.9	9.2	8.6
30	0.492	39.0	32.5	27.8	24.4	21.6	19.5	17.7	16.2	15.0	13.9	13.0
40	0.661	52.4	43.6	37.4	32.7	29.1	26.2	23.8	21.8	20.1	18.7	17.5
50	0.739	58.5	48.8	41.8	36.6	32.5	29.3	26.6	24.4	22.5	20.9	19.5
60	0.825	65.3	54.5	46.7	40.8	36.3	32.7	29.7	27.2	25.1	23.3	21.8
70	0.885	70.1	58.4	50.1	43.8	38.9	35.0	31.9	29.2	27.0	25.0	23.4
80	0.943	74.7	62.2	53.3	46.7	41.5	37.3	33.9	31.1	28.7	26.7	24.9
90	1.000	79.2	66.0	56.6	49.5	44.0	39.6	36.0	33.0	30.5	28.3	26.4
100	1.054	83.5	69.6	59.6	52.2	46.4	41.7	37.9	34.8	32.1	29.8	27.8
120	1.154	91.4	76.2	65.3	57.1	50.8	45.7	41.5	38.1	35.2	32.6	30.5
140	1.247	98.8	82.3	70.5	61.7	54.9	49.4	44.9	41.2	38.0	35.3	32.9
TDVRF 05		Application Rate GPA at MPH Based on 15" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow											
PSI	GPM	5	6	7	8	9	10	11	12	13	14	15
20	0.642	50.8	42.4	36.3	31.8	28.2	25.4	23.1	21.2	19.6	18.2	16.9
30	0.758	60.0	50.0	42.9	37.5	33.4	30.0	27.3	25.0	23.1	21.4	20.0
40	0.930	73.7	61.4	52.6	46.0	40.9	36.8	33.5	30.7	28.3	26.3	24.6
50	1.039	82.3	68.6	58.8	51.4	45.7	41.1	37.4	34.3	31.6	29.4	27.4
60	1.091	86.4	72.0	61.7	54.0	48.0	43.2	39.3	36.0	33.2	30.9	28.8
70	1.269	100.5	83.8	71.8	62.8	55.8	50.3	45.7	41.9	38.7	35.9	33.5
80	1.368	108.3	90.3	77.4	67.7	60.2	54.2	49.2	45.1	41.7	38.7	36.1
90	1.451	114.9	95.8	82.1	71.8	63.8	57.5	52.2	47.9	44.2	41.0	38.3
100	1.530	121.2	101.0	86.6	75.7	67.3	60.6	55.1	50.5	46.6	43.3	40.4
120	1.676	132.7	110.6	94.8	83.0	73.7	66.4	60.3	55.3	51.1	47.4	44.2
140	1.810	143.4	119.5	102.4	89.6	79.6	71.7	65.2	59.7	55.1	51.2	47.8

Most sprayers will allow lower application rates down to 15 PSI.

20 Inch Corn All Recommendations based on Water Specific Gravity											
USE THIS CHART FOR INSIDE NOZZLE SELECTION - 20 INCH CORN											
TDVRF 015		Application Rate GPA at MPH Based on 10" Spacing (2 Nozzles Per YDROP)									
Pressure	Flow										
PSI	GPM	6	7	8	9	10	11	12	13	14	15
20	0.174	17.2	14.8	12.9	11.5	10.3	9.4	8.6	8.0	7.4	6.9
30	0.266	26.3	22.6	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.5
40	0.350	34.7	29.7	26.0	23.1	20.8	18.9	17.3	16.0	14.9	13.9
50	0.391	38.7	33.2	29.0	25.8	23.2	21.1	19.4	17.9	16.6	15.5
60	0.443	43.9	37.6	32.9	29.2	26.3	23.9	21.9	20.2	18.8	17.5
70	0.483	47.8	41.0	35.9	31.9	28.7	26.1	23.9	22.1	20.5	19.1
80	0.516	51.1	43.8	38.3	34.1	30.7	27.9	25.5	23.6	21.9	20.4
90	0.537	53.2	45.6	39.9	35.4	31.9	29.0	26.6	24.5	22.8	21.3
100	0.566	56.0	48.0	42.0	37.4	33.6	30.6	28.0	25.9	24.0	22.4
120	0.620	61.4	52.6	46.0	40.9	36.8	33.5	30.7	28.3	26.3	24.6
140	0.670	66.3	56.9	49.7	44.2	39.8	36.2	33.2	30.6	28.4	26.5
TDVRF 02		Application Rate GPA at MPH Based on 10" Spacing (2 Nozzles Per YDROP)									
Pressure	Flow										
PSI	GPM	6	7	8	9	10	11	12	13	14	15
20	0.251	24.8	21.3	18.6	16.6	14.9	13.6	12.4	11.5	10.6	9.9
30	0.384	38.0	32.6	28.5	25.3	22.8	20.7	19.0	17.5	16.3	15.2
40	0.512	50.7	43.4	38.0	33.8	30.4	27.6	25.3	23.4	21.7	20.3
50	0.575	56.9	48.8	42.7	38.0	34.2	31.1	28.5	26.3	24.4	22.8
60	0.653	64.6	55.4	48.5	43.1	38.8	35.3	32.3	29.8	27.7	25.9
70	0.696	68.9	59.1	51.7	45.9	41.3	37.6	34.5	31.8	29.5	27.6
80	0.744	73.7	63.1	55.2	49.1	44.2	40.2	36.8	34.0	31.6	29.5
90	0.779	77.1	66.1	57.8	51.4	46.3	42.1	38.6	35.6	33.1	30.8
100	0.821	81.3	69.7	61.0	54.2	48.8	44.3	40.6	37.5	34.8	32.5
120	0.900	89.1	76.4	66.8	59.4	53.5	48.6	44.6	41.1	38.2	35.6
140	0.972	96.2	82.5	72.2	64.2	57.7	52.5	48.1	44.4	41.2	38.5
TDVRF 03		Application Rate GPA at MPH Based on 10" Spacing (2 Nozzles Per YDROP)									
Pressure	Flow										
PSI	GPM	6	7	8	9	10	11	12	13	14	15
20	0.326	32.3	27.7	24.2	21.5	19.4	17.6	16.1	14.9	13.8	12.9
30	0.492	48.7	41.7	36.5	32.5	29.2	26.6	24.4	22.5	20.9	19.5
40	0.661	65.4	56.1	49.1	43.6	39.3	35.7	32.7	30.2	28.0	26.2
50	0.739	73.2	62.7	54.9	48.8	43.9	39.9	36.6	33.8	31.4	29.3
60	0.825	81.7	70.0	61.3	54.5	49.0	44.6	40.8	37.7	35.0	32.7
70	0.885	87.6	75.1	65.7	58.4	52.6	47.8	43.8	40.4	37.5	35.0
80	0.943	93.4	80.0	70.0	62.2	56.0	50.9	46.7	43.1	40.0	37.3
90	1.000	99.0	84.9	74.3	66.0	59.4	54.0	49.5	45.7	42.4	39.6
100	1.054	104.3	89.4	78.3	69.6	62.6	56.9	52.2	48.2	44.7	41.7
120	1.154	114.2	97.9	85.7	76.2	68.5	62.3	57.1	52.7	49.0	45.7
140	1.247	123.5	105.8	92.6	82.3	74.1	67.3	61.7	57.0	52.9	49.4
TDVRF 05		Application Rate GPA at MPH Based on 10" Spacing (2 Nozzles Per YDROP)									
Pressure	Flow										
PSI	GPM	6	7	8	9	10	11	12	13	14	15
20	0.642	63.6	54.5	47.7	42.4	38.1	34.7	31.8	29.3	27.2	25.4
30	0.758	75.0	64.3	56.3	50.0	45.0	40.9	37.5	34.6	32.2	30.0
40	0.930	92.1	78.9	69.1	61.4	55.2	50.2	46.0	42.5	39.5	36.8
50	1.039	102.9	88.2	77.1	68.6	61.7	56.1	51.4	47.5	44.1	41.1
60	1.091	108.0	92.6	81.0	72.0	64.8	58.9	54.0	49.9	46.3	43.2
70	1.269	125.6	107.7	94.2	83.8	75.4	68.5	62.8	58.0	53.8	50.3
80	1.368	135.4	116.1	101.6	90.3	81.3	73.9	67.7	62.5	58.0	54.2
90	1.451	143.6	123.1	107.7	95.8	86.2	78.4	71.8	66.3	61.6	57.5
100	1.530	151.5	129.8	113.6	101.0	90.9	82.6	75.7	69.9	64.9	60.6
120	1.676	165.9	142.2	124.4	110.6	99.6	90.5	83.0	76.6	71.1	66.4
140	1.810	179.2	153.6	134.4	119.5	107.5	97.7	89.6	82.7	76.8	71.7

Most sprayers will allow lower application rates down to 15 PSI.

Spraying Liquids with a Density other than Water

Since all tabulations we have computed are based on spraying water, which weighs 8.34 lbs per USA gallon (1 kilogram per liter) conversion factors must be used when spraying liquids that are heavier or lighter than water. To determine the proper size nozzle for the liquid to be sprayed, first multiply the desired GPM or GPA of liquid by the water rate conversion factor. Then use the new converted GPM or GPA rate to select the proper size nozzle.

Example:

Desired application rate is 20 GPA of 28% N. Determine the correct nozzle size as follows:

GPA (liquid other than water) x Conversion Factor
= GPA

20 GPA (28%) x 1.13
= 22.6 GPA (water)

The applicator should choose a nozzle size that will supply 22.6 GPA of water at the desired pressure.

Weight of Solution	Specific Gravity	Conversion Factor
7.0 lbs/gal.	.84	.92
8.0 lbs/gal.	.96	.88
8.34 lbs/gal.	1.00 - WATER	1.00
9.0 lbs/gal.	1.08	1.04
10.0 lbs/gal.	1.20	1.10
10.65 lbs/gal.	1.28 - 28% nitrogen	1.13
11.0 lbs/gal.	1.32	1.15
12.0 lbs/gal.	1.44	1.20
14.0 lbs/gal.	1.68	1.30

Disk Orifice Rate Guidelines

1. It is assumed that a 360 Y-DROP™ unit is between every row on the system and the 360 Y-DROP units apply a band of nutrients to each side of the plant base.
2. Your specific sprayer's application pressure may not reach the entire range displayed in the orifice flow rate tables. Please be sure to take the capability of the specific sprayer into consideration prior to size selection.
3. When applying solutions other than UAN, application rates may vary due to product weight. Example - Ammonium Thiosulfate or Potassium Thiosulfate (you will need to use the proper conversion factor based on that nutrient).
4. To accommodate the fact that the outermost drag hoses only apply to one side of the row on most 360 Y-DROP systems, the outermost orifice plate will need to have double the capacity in order to apply a full rate to the row. The **Double Rate Correlation Table** below shows which orifice plates will need to be included for the outermost drag hose on each side of the sprayer.

Solution Properties		
Solution	Density of Solution lbs/gal.	Conversion Factor unitless
UAN (28%)	10.65	1.13
UAN (32%)	11.08	1.15
Water	8.34	1

Double Rate Correlation Orifice Plate Sizes		
Inside rows		Outside rows
48	→	73
57	→	78
61	→	91
73	→	103
78	→	110
91	→	132

UAN Constants

- UAN (28%) - Weight per gallon 10.65 lbs @ 28% Nitrogen = **2.98 lbs N per gallon 28%**
- UAN (32%) - Weight per gallon 11.08 lbs @ 32% Nitrogen = **3.55 lbs N per gallon 32%**

EXAMPLE #1: Desire to apply 50 lbs Nitrogen using 32% UAN

$$\frac{50 \text{ (lbs N)}}{3.55 \text{ (lbs. N per gallon UAN 32\%)}} = \mathbf{14.08 \text{ GPA}}$$

- You would need to apply 14.08 GPA of product
- Based on 32% weight per gallon vs. water you MUST apply a conversion factor for accurate application:
14.08 (based on 32% UAN) × **1.15** (32% Conversion factor) = **16.19 GPA** (this is the GPA you reference in the chart).
- Utilize Rate Charts for Orifices or Variable Rate Nozzles attached - look at speed and rate range on charts based on 16.19 GPA to apply your target rate of 50 lbs N using 32% UAN (make sure to use chart based on your row spacing).

EXAMPLE #2: Desire to apply 50 lbs Nitrogen using 28% UAN

$$\frac{50 \text{ (lbs N)}}{2.98 \text{ (lbs. N per gallon UAN 28\%)}} = \mathbf{16.78 \text{ GPA}}$$

- You would need to apply 16.78 GPA of product
- Based on 28% weight per gallon vs. water you MUST apply a conversion factor for accurate application.
16.78 (Based on 28% UAN) × **1.13** (28% Conversion factor) = **18.96 GPA** (this is the GPA you reference in the chart).
- Utilize Rate Charts for Orifices or Variable Rate Nozzles attached - look at speed and rate range on charts based on 18.96 GPA to apply your target rate of 50 lbs N using 28% UAN (make sure to use chart based on your row spacing).

EXAMPLE #3: Desire to apply 40 GPA using 28% UAN

- Based on 28% weight per gallon vs. water you MUST apply a conversion factor for accurate application.
40 (GPA 28%) × **1.13** (28% Conversion factor) = **45.2 GPA** (this is the GPA you reference in the chart).
- Utilize Rate Charts for Orifices or Variable Rate Nozzles attached - look at speed and rate range on charts based on 45.2 GPA to apply your target rate of 40 GPA using 28% UAN (make sure to use chart based on your row spacing).

Other Considerations

- For row widths other than 20" or 30" special consideration will need to be made to convert the rate tables into the correct values.
- Charts attached are made based on our recommended application of placing nutrients in a band on each side of the row. If application is only applied in a band on one side of the row, rate table values will need to be multiplied by two.

Disk Orifice Rate Chart: 48

Note: All table values must be converted from GPA_(water) to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

TABLE A

Press.	Flow	GPA _(Water) at MPH based on 10" spacing (20" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.202	40.0	30.0	24.0	20.0	17.1	15.0	13.3	12.0	10.9	10.0	9.2	8.6	8.0	7.5	7.1	6.7	6.0
30	0.248	49.1	36.8	29.5	24.6	21.0	18.4	16.4	14.7	13.4	12.3	11.3	10.5	9.8	9.2	8.7	8.2	7.4
40	0.286	56.6	42.5	34.0	28.3	24.3	21.2	18.9	17.0	15.4	14.2	13.1	12.1	11.3	10.6	10.0	9.4	8.5
50	0.320	63.4	47.5	38.0	31.7	27.2	23.8	21.1	19.0	17.3	15.8	14.6	13.6	12.7	11.9	11.2	10.6	9.5
60	0.350	69.3	52.0	41.6	34.7	29.7	26.0	23.1	20.8	18.9	17.3	16.0	14.9	13.9	13.0	12.2	11.6	10.4
70	0.372	73.7	55.3	44.2	36.8	31.6	27.6	24.6	22.1	20.1	18.4	17.0	15.8	14.7	13.8	13.0	12.3	11.1
80	0.391	77.3	58.0	46.4	38.7	33.1	29.0	25.8	23.2	21.1	19.3	17.8	16.6	15.5	14.5	13.6	12.9	11.6
90	0.404	79.9	60.0	48.0	40.0	34.3	30.0	26.6	24.0	21.8	20.0	18.4	17.1	16.0	15.0	14.1	13.3	12.0
100	0.412	81.5	61.1	48.9	40.8	34.9	30.6	27.2	24.5	22.2	20.4	18.8	17.5	16.3	15.3	14.4	13.6	12.2

TABLE B

Press.	Flow	GPA _(Water) at MPH based on 15" spacing (30" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.202	26.7	20.0	16.0	13.3	11.4	10.0	8.9	8.0	7.3	6.7	6.2	5.7	5.3	5.0	4.7	4.4	4.0
30	0.248	32.7	24.6	19.6	16.4	14.0	12.3	10.9	9.8	8.9	8.2	7.6	7.0	6.5	6.1	5.8	5.5	4.9
40	0.286	37.8	28.3	22.7	18.9	16.2	14.2	12.6	11.3	10.3	9.4	8.7	8.1	7.6	7.1	6.7	6.3	5.7
50	0.320	42.2	31.7	25.3	21.1	18.1	15.8	14.1	12.7	11.5	10.6	9.7	9.1	8.4	7.9	7.5	7.0	6.3
60	0.350	46.2	34.7	27.7	23.1	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2	7.7	6.9
70	0.372	49.1	36.8	29.5	24.6	21.1	18.4	16.4	14.7	13.4	12.3	11.3	10.5	9.8	9.2	8.7	8.2	7.4
80	0.391	51.6	38.7	30.9	25.8	22.1	19.3	17.2	15.5	14.1	12.9	11.9	11.0	10.3	9.7	9.1	8.6	7.7
90	0.404	53.3	40.0	32.0	26.6	22.8	20.0	17.8	16.0	14.5	13.3	12.3	11.4	10.7	10.0	9.4	8.9	8.0
100	0.412	54.3	40.8	32.6	27.2	23.3	20.4	18.1	16.3	14.8	13.6	12.5	11.6	10.9	10.2	9.6	9.1	8.2

*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

*Values within +/-5% of actual

Disk Orifice Rate Chart: 57

Note: All table values must be converted from GPA_(water) to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

TABLE A

Press.	Flow	GPA _(Water) at MPH based on 10" spacing (20" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.283	56.0	42.0	33.6	28.0	24.0	21.0	18.7	16.8	15.3	14.0	12.9	12.0	11.2	10.5	9.9	9.3	8.4
30	0.346	68.5	51.4	41.1	34.3	29.4	25.7	22.8	20.6	18.7	17.1	15.8	14.7	13.7	12.8	12.1	11.4	10.3
40	0.400	79.2	59.4	47.5	39.6	33.9	29.7	26.4	23.8	21.6	19.8	18.3	17.0	15.8	14.9	14.0	13.2	11.9
50	0.447	88.5	66.4	53.1	44.3	37.9	33.2	29.5	26.6	24.1	22.1	20.4	19.0	17.7	16.6	15.6	14.8	13.3
60	0.490	97.0	72.8	58.2	48.5	41.6	36.4	32.3	29.1	26.5	24.3	22.4	20.8	19.4	18.2	17.1	16.2	14.6
70	0.522	103.4	77.5	62.0	51.7	44.3	38.8	34.5	31.0	28.2	25.8	23.9	22.2	20.7	19.4	18.2	17.2	15.5
80	0.549	108.8	81.6	65.3	54.4	46.6	40.8	36.3	32.6	29.7	27.2	25.1	23.3	21.8	20.4	19.2	18.1	16.3
90	0.570	112.9	84.7	67.7	56.4	48.4	42.3	37.6	33.9	30.8	28.2	26.0	24.2	22.6	21.2	19.9	18.8	16.9
100	0.584	115.6	86.7	69.4	57.8	49.5	43.3	38.5	34.7	31.5	28.9	26.7	24.8	23.1	21.7	20.4	19.3	17.3

TABLE B

Press.	Flow	GPA _(Water) at MPH based on 15" spacing (30" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.283	37.4	28.0	22.4	18.7	16.0	14.0	12.5	11.2	10.2	9.3	8.6	8.0	7.5	7.0	6.6	6.2	5.6
30	0.346	45.7	34.3	27.4	22.8	19.6	17.1	15.2	13.7	12.5	11.4	10.5	9.8	9.1	8.6	8.1	7.6	6.9
40	0.400	52.8	39.6	31.7	26.4	22.6	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.6	9.9	9.3	8.8	7.9
50	0.447	59.0	44.3	35.4	29.5	25.3	22.1	19.7	17.7	16.1	14.8	13.6	12.6	11.8	11.1	10.4	9.8	8.9
60	0.490	64.7	48.5	38.8	32.3	27.7	24.3	21.6	19.4	17.6	16.2	14.9	13.9	12.9	12.1	11.4	10.8	9.7
70	0.522	68.9	51.7	41.4	34.5	29.5	25.8	23.0	20.7	18.8	17.2	15.9	14.8	13.8	12.9	12.2	11.5	10.3
80	0.549	72.5	54.4	43.5	36.3	31.1	27.2	24.2	21.8	19.8	18.1	16.7	15.5	14.5	13.6	12.8	12.1	10.9
90	0.570	75.2	56.4	45.1	37.6	32.2	28.2	25.1	22.6	20.5	18.8	17.4	16.1	15.0	14.1	13.3	12.5	11.3
100	0.584	77.1	57.8	46.2	38.5	33.0	28.9	25.7	23.1	21.0	19.3	17.8	16.5	15.4	14.4	13.6	12.8	11.6

*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

*Values within +/-5% of actual

Disk Orifice Rate Chart: 61

Note: All table values must be converted from GPA_(water) to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

TABLE A

Press.	Flow	GPA _(Water) at MPH based on 10" spacing (20" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.330	65.3	49.0	39.2	32.7	28.0	24.5	21.8	19.6	17.8	16.3	15.1	14.0	13.1	12.3	11.5	10.9	9.8
30	0.404	80.0	60.0	48.0	40.0	34.3	30.0	26.7	24.0	21.8	20.0	18.5	17.1	16.0	15.0	14.1	13.3	12.0
40	0.466	92.3	69.2	55.4	46.1	39.5	34.6	30.8	27.7	25.2	23.1	21.3	19.8	18.5	17.3	16.3	15.4	13.8
50	0.521	103.2	77.4	61.9	51.6	44.2	38.7	34.4	30.9	28.1	25.8	23.8	22.1	20.6	19.3	18.2	17.2	15.5
60	0.571	113.1	84.8	67.8	56.5	48.5	42.4	37.7	33.9	30.8	28.3	26.1	24.2	22.6	21.2	20.0	18.8	17.0
70	0.613	121.3	91.0	72.8	60.7	52.0	45.5	40.4	36.4	33.1	30.3	28.0	26.0	24.3	22.7	21.4	20.2	18.2
80	0.658	130.3	97.7	78.2	65.1	55.8	48.9	43.4	39.1	35.5	32.6	30.1	27.9	26.1	24.4	23.0	21.7	19.5
90	0.701	138.8	104.1	83.3	69.4	59.5	52.0	46.3	41.6	37.8	34.7	32.0	29.7	27.8	26.0	24.5	23.1	20.8
100	0.741	146.8	110.1	88.1	73.4	62.9	55.0	48.9	44.0	40.0	36.7	33.9	31.4	29.4	27.5	25.9	24.5	22.0

TABLE B

Press.	Flow	GPA _(Water) at MPH based on 15" spacing (30" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.330	43.6	32.7	26.1	21.8	18.7	16.3	14.5	13.1	11.9	10.9	10.1	9.3	8.7	8.2	7.7	7.3	6.5
30	0.404	53.3	40.0	32.0	26.7	22.9	20.0	17.8	16.0	14.5	13.3	12.3	11.4	10.7	10.0	9.4	8.9	8.0
40	0.466	61.5	46.1	36.9	30.8	26.4	23.1	20.5	18.5	16.8	15.4	14.2	13.2	12.3	11.5	10.9	10.3	9.2
50	0.521	68.8	51.6	41.3	34.4	29.5	25.8	22.9	20.6	18.8	17.2	15.9	14.7	13.8	12.9	12.1	11.5	10.3
60	0.571	75.4	56.5	45.2	37.7	32.3	28.3	25.1	22.6	20.6	18.8	17.4	16.2	15.1	14.1	13.3	12.6	11.3
70	0.613	80.9	60.7	48.5	40.4	34.7	30.3	27.0	24.3	22.1	20.2	18.7	17.3	16.2	15.2	14.3	13.5	12.1
80	0.658	86.8	65.1	52.1	43.4	37.2	32.6	28.9	26.1	23.7	21.7	20.0	18.6	17.4	16.3	15.3	14.5	13.0
90	0.701	92.5	69.4	55.5	46.3	39.6	34.7	30.8	27.8	25.2	23.1	21.3	19.8	18.5	17.3	16.3	15.4	13.9
100	0.741	97.8	73.4	58.7	48.9	41.9	36.7	32.6	29.4	26.7	24.5	22.6	21.0	19.6	18.3	17.3	16.3	14.7

*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

*Values within +/-5% of actual

Disk Orifice Rate Chart: 73

Note: All table values must be converted from GPA_(water) to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

TABLE A

Press.	Flow	GPA _(Water) at MPH based on 10" spacing (20" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.467	92.5	69.3	55.5	46.2	39.6	34.7	30.8	27.7	25.2	23.1	21.3	19.8	18.5	17.3	16.3	15.4	13.9
30	0.572	113.3	84.9	68.0	56.6	48.5	42.5	37.8	34.0	30.9	28.3	26.1	24.3	22.7	21.2	20.0	18.9	17.0
40	0.660	130.7	98.0	78.4	65.3	56.0	49.0	43.6	39.2	35.6	32.7	30.2	28.0	26.1	24.5	23.1	21.8	19.6
50	0.738	146.1	109.6	87.7	73.1	62.6	54.8	48.7	43.8	39.9	36.5	33.7	31.3	29.2	27.4	25.8	24.4	21.9
60	0.808	160.0	120.0	96.0	80.0	68.6	60.0	53.3	48.0	43.6	40.0	36.9	34.3	32.0	30.0	28.2	26.7	24.0
70	0.852	168.8	126.6	101.3	84.4	72.3	63.3	56.3	50.6	46.0	42.2	38.9	36.2	33.8	31.6	29.8	28.1	25.3
80	0.901	178.4	133.8	107.0	89.2	76.5	66.9	59.5	53.5	48.7	44.6	41.2	38.2	35.7	33.4	31.5	29.7	26.8
90	0.941	186.3	139.7	111.8	93.1	79.8	69.9	62.1	55.9	50.8	46.6	43.0	39.9	37.3	34.9	32.9	31.0	27.9
100	0.972	192.4	144.3	115.5	96.2	82.5	72.2	64.1	57.7	52.5	48.1	44.4	41.2	38.5	36.1	34.0	32.1	28.9

TABLE B

Press.	Flow	GPA _(Water) at MPH based on 15" spacing (30" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.467	61.6	46.2	37.0	30.8	26.4	23.1	20.5	18.5	16.8	15.4	14.2	13.2	12.3	11.6	10.9	10.3	9.2
30	0.572	75.5	56.6	45.3	37.8	32.4	28.3	25.2	22.7	20.6	18.9	17.4	16.2	15.1	14.2	13.3	12.6	11.3
40	0.660	87.1	65.3	52.3	43.6	37.3	32.7	29.0	26.1	23.8	21.8	20.1	18.7	17.4	16.3	15.4	14.5	13.1
50	0.738	97.4	73.1	58.4	48.7	41.7	36.5	32.5	29.2	26.6	24.4	22.5	20.9	19.5	18.3	17.2	16.2	14.6
60	0.808	106.7	80.0	64.0	53.3	45.7	40.0	35.6	32.0	29.1	26.7	24.6	22.9	21.3	20.0	18.8	17.8	16.0
70	0.852	112.5	84.4	67.5	56.3	48.2	42.2	37.5	33.8	30.7	28.1	26.0	24.1	22.5	21.1	19.9	18.8	16.9
80	0.901	118.9	89.2	71.4	59.5	51.0	44.6	39.6	35.7	32.4	29.7	27.4	25.5	23.8	22.3	21.0	19.8	17.8
90	0.941	124.2	93.1	74.5	62.1	53.2	46.6	41.4	37.3	33.9	31.0	28.7	26.6	24.8	23.3	21.9	20.7	18.6
100	0.972	128.3	96.2	77.0	64.1	55.0	48.1	42.8	38.5	35.0	32.1	29.6	27.5	25.7	24.1	22.6	21.4	19.2

*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

*Values within +/-5% of actual

Disk Orifice Rate Chart: 78

Note: All table values must be converted from GPA_(water) to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

TABLE A

Press.	Flow	GPA _(Water) at MPH based on 10" spacing (20" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.544	107.7	80.8	64.6	53.9	46.2	40.4	35.9	32.3	29.4	26.9	24.9	23.1	21.5	20.2	19.0	18.0	16.2
30	0.667	132.1	99.0	79.2	66.0	56.6	49.5	44.0	39.6	36.0	33.0	30.5	28.3	26.4	24.8	23.3	22.0	19.8
40	0.770	152.5	114.3	91.5	76.2	65.3	57.2	50.8	45.7	41.6	38.1	35.2	32.7	30.5	28.6	26.9	25.4	22.9
50	0.861	170.5	127.9	102.3	85.2	73.1	63.9	56.8	51.1	46.5	42.6	39.3	36.5	34.1	32.0	30.1	28.4	25.6
60	0.943	186.7	140.0	112.0	93.4	80.0	70.0	62.2	56.0	50.9	46.7	43.1	40.0	37.3	35.0	32.9	31.1	28.0
70	0.999	197.9	148.4	118.7	98.9	84.8	74.2	66.0	59.4	54.0	49.5	45.7	42.4	39.6	37.1	34.9	33.0	29.7
80	1.061	210.0	157.5	126.0	105.0	90.0	78.8	70.0	63.0	57.3	52.5	48.5	45.0	42.0	39.4	37.1	35.0	31.5
90	1.113	220.4	165.3	132.3	110.2	94.5	82.7	73.5	66.1	60.1	55.1	50.9	47.2	44.1	41.3	38.9	36.7	33.1
100	1.157	229.0	171.8	137.4	114.5	98.2	85.9	76.3	68.7	62.5	57.3	52.9	49.1	45.8	42.9	40.4	38.2	34.4

TABLE B

Press.	Flow	GPA _(Water) at MPH based on 15" spacing (30" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.544	71.8	53.9	43.1	35.9	30.8	26.9	23.9	21.5	19.6	18.0	16.6	15.4	14.4	13.5	12.7	12.0	10.8
30	0.667	88.0	66.0	52.8	44.0	37.7	33.0	29.3	26.4	24.0	22.0	20.3	18.9	17.6	16.5	15.5	14.7	13.2
40	0.770	101.6	76.2	61.0	50.8	43.6	38.1	33.9	30.5	27.7	25.4	23.5	21.8	20.3	19.1	17.9	16.9	15.2
50	0.861	113.7	85.2	68.2	56.8	48.7	42.6	37.9	34.1	31.0	28.4	26.2	24.4	22.7	21.3	20.1	18.9	17.0
60	0.943	124.5	93.4	74.7	62.2	53.3	46.7	41.5	37.3	33.9	31.1	28.7	26.7	24.9	23.3	22.0	20.7	18.7
70	0.999	131.9	98.9	79.1	66.0	56.5	49.5	44.0	39.6	36.0	33.0	30.4	28.3	26.4	24.7	23.3	22.0	19.8
80	1.061	140.0	105.0	84.0	70.0	60.0	52.5	46.7	42.0	38.2	35.0	32.3	30.0	28.0	26.3	24.7	23.3	21.0
90	1.113	147.0	110.2	88.2	73.5	63.0	55.1	49.0	44.1	40.1	36.7	33.9	31.5	29.4	27.6	25.9	24.5	22.0
100	1.157	152.7	114.5	91.6	76.3	65.4	57.3	50.9	45.8	41.6	38.2	35.2	32.7	30.5	28.6	26.9	25.4	22.9

*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

*Values within +/-5% of actual

Disk Orifice Rate Chart: 91

Note: All table values must be converted from GPA_(water) to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

TABLE A

Press.	Flow	GPA _(Water) at MPH based on 10" spacing (20" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.739	146.3	109.7	87.8	73.2	62.7	54.9	48.8	43.9	39.9	36.6	33.8	31.4	29.3	27.4	25.8	24.4	21.9
30	0.905	179.2	134.4	107.5	89.6	76.8	67.2	59.7	53.8	48.9	44.8	41.4	38.4	35.8	33.6	31.6	29.9	26.9
40	1.050	207.9	155.9	124.7	104.0	89.1	78.0	69.3	62.4	56.7	52.0	48.0	44.6	41.6	39.0	36.7	34.7	31.2
50	1.170	231.7	173.7	139.0	115.8	99.3	86.9	77.2	69.5	63.2	57.9	53.5	49.6	46.3	43.4	40.9	38.6	34.7
60	1.280	253.4	190.1	152.1	126.7	108.6	95.0	84.5	76.0	69.1	63.4	58.5	54.3	50.7	47.5	44.7	42.2	38.0
70	1.356	268.4	201.3	161.0	134.2	115.0	100.6	89.5	80.5	73.2	67.1	61.9	57.5	53.7	50.3	47.4	44.7	40.3
80	1.442	285.6	214.2	171.3	142.8	122.4	107.1	95.2	85.7	77.9	71.4	65.9	61.2	57.1	53.5	50.4	47.6	42.8
90	1.518	300.6	225.4	180.3	150.3	128.8	112.7	100.2	90.2	82.0	75.1	69.4	64.4	60.1	56.4	53.0	50.1	45.1
100	1.583	313.5	235.1	188.1	156.7	134.3	117.5	104.5	94.0	85.5	78.4	72.3	67.2	62.7	58.8	55.3	52.2	47.0

TABLE B

Press.	Flow	GPA _(Water) at MPH based on 15" spacing (30" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	0.739	97.5	73.2	58.5	48.8	41.8	36.6	32.5	29.3	26.6	24.4	22.5	20.9	19.5	18.3	17.2	16.3	14.6
30	0.905	119.5	89.6	71.7	59.7	51.2	44.8	39.8	35.8	32.6	29.9	27.6	25.6	23.9	22.4	21.1	19.9	17.9
40	1.050	138.6	104.0	83.2	69.3	59.4	52.0	46.2	41.6	37.8	34.7	32.0	29.7	27.7	26.0	24.5	23.1	20.8
50	1.170	154.4	115.8	92.7	77.2	66.2	57.9	51.5	46.3	42.1	38.6	35.6	33.1	30.9	29.0	27.3	25.7	23.2
60	1.280	169.0	126.7	101.4	84.5	72.4	63.4	56.3	50.7	46.1	42.2	39.0	36.2	33.8	31.7	29.8	28.2	25.3
70	1.356	178.9	134.2	107.4	89.5	76.7	67.1	59.6	53.7	48.8	44.7	41.3	38.3	35.8	33.5	31.6	29.8	26.8
80	1.442	190.4	142.8	114.2	95.2	81.6	71.4	63.5	57.1	51.9	47.6	43.9	40.8	38.1	35.7	33.6	31.7	28.6
90	1.518	200.4	150.3	120.2	100.2	85.9	75.1	66.8	60.1	54.7	50.1	46.2	42.9	40.1	37.6	35.4	33.4	30.1
100	1.583	209.0	156.7	125.4	104.5	89.6	78.4	69.7	62.7	57.0	52.2	48.2	44.8	41.8	39.2	36.9	34.8	31.3

*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

*Values within +/-5% of actual

Use the chart below to determine the additional components that are available to supplement the 40' SMP for optimal performance on 22" spacing.

Item #	Item Description	Y-Drop Boom Bracket Kits		Extension Tube		OEM Boom Mount Bracket Kits	
		Part Numbers	Quantity	Part Number	Quantity	Part Number(s)	Quantity
410504	Sprayer Mount Pkg - JD 4830/4730/4720 - 40 ft	415007	2	417039	2	417101, 417102	2, 2
410514	Sprayer Mount Pkg - JD 4930/4940 - 40 ft	415007	2	417039	2	417102	2
410524	Sprayer Mount Pkg - JD R-Series 80, 90, 100' Boom - 40 ft	415007	2	417039	2	417108	4
410534	Sprayer Mount Pkg - JD R-Series 120' Boom - 40 ft	415007	2	417039	2	417108	4
410544	Sprayer Mount Pkg - Hagie STS Steel 80, 90, 100' Boom (2000-Cur.) - 40 ft	415007	2	417039	2	417104	4
410554	Sprayer Mount Pkg - Hagie 120' Aluminum Boom (2012-Cur.) - 40 ft	415007	2	417039	2	417103	4
410564	Sprayer Mount Pkg - Case IH 120' Boom - 40 ft	415007	2	417039	2	417108, 417110	2,2
410574	Sprayer Mount Pkg - Case IH 80'-90' Boom - 40 ft	415007	2	417045	2	417105, 417107	2, 2
410584	Sprayer Mount Pkg - Miller Nitro (2008+) - 40 ft	415007	2	417039	2	417112	2
410594	Sprayer Mount Pkg - New Holland - 40 ft	415007	2	417039	2	417112	2
410604	Sprayer Mount Pkg - Miller Nitro (Pre-2008) - 40 ft	415007	2	417039	2	417112	2
410614	Sprayer Mount Pkg - Rogator 80, 90, 100' Boom - 40 ft	415007	2	417039	2	417105	4
410624	Sprayer Mount Pkg - Rogator 120' Boom - 40 ft	415007	2	417039	2	417105	4
410634	Sprayer Mount Pkg - Hagie DTS (2016+) - 40 ft	415007	2	417039	2	417107	4
410644	Sprayer Mount Pkg - Apache 80, 90, 100' Boom - 40 ft	415007	2	417039	2	417107	2
410654	Sprayer Mount Pkg - Hagie DTS (Pre-2016), 284, & 2100 - 40 ft	44' not supported		44' not supported		44' not supported	
410664	Sprayer Mount Pkg - JD 4630 - 40 ft	415007	2	417039	2	417108	4
410684	Sprayer Mount Pkg - JD 4710 - 40 ft	415007	2	417039	2	417105	2
410694	Sprayer Mount Pkg - JD K&S Aluminum - 40 ft	415007	2	417039	2	417103, 417120	2,2
410704	Sprayer Mount Pkg - Hagie Delta Boom - 40 ft	415007	2	417039	2	417102	2
410714	Sprayer Mount Pkg - New Holland Rear Boom, Miller Condor - 40 ft	415007	2	417039	2	417103	4