

SENSOR ROD TAKES GUESSWORK OUT OF MEASUREMENT

This rod glides over field terrain reporting the position of the 360 Y-DROP base to your boom-control system. It flexes so it easily handles contours and turns.


RUGGED AND RELIABLE

The height-control system is designed to adjust for terrain changes rather than rocks, washes and gullies. For those obstacles, we offer a rugged breakaway system. If an obstruction is hit by the base, the boom will automatically raise to avoid it. Once past the obstacle, 360 GLIDE quickly gets back to work controlling boom height.



SMALL DETAILS MAKE A BIG DIFFERENCE

- 360 GLIDE uses a mechanical sensor rod to automatically maintain the ideal position of the 360 Y-DROP base.
- The sensor rod keeps the delivery hoses in the right angle to deliver nitrogen directly to the base of the corn plant.
- Designed to adjust for terrain changes, 360 GLIDE constantly adjusts the 360 Y-DROP base position relative to the ground.
- Rugged breakaway system protects the base from ground contact.
- 360 GLIDE plugs into your existing control system and you operate it like you control your current system.
- No additional monitors. No elaborate configuration or settings.

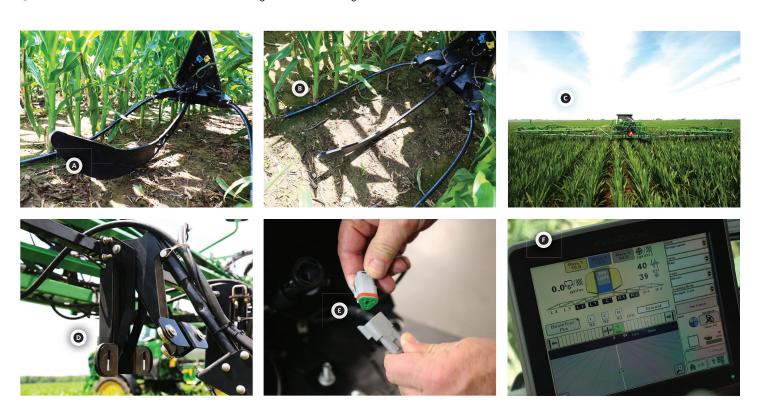

SELECT THE MODEL THAT FITS YOUR SPRAYER

360 GLIDE is available for John Deere applicators equipped with BoomTrac™ Pro, Hagie and Rogator applicators with Norac UC5 and UC7.

JOSH FRANSEEN // CENTRAL SOUTHERN, WISCONSIN

"When we first got the 360 Y-DROPs we went with the 360 GLIDE system right away. It's definitely much easier to run than running it manually. If they break away, the boom raises up, finds it's height and away you go."