



# 2016 360 Y-DROP™ Technical Guide



Issued May 19, 2016

## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



## Order a 360 Y-DROP™ System

### STEP 1 - Sprayer Mount Package (SMP)

- ▶ **The Sprayer Mount Package (SMP) is a pre-packaged set of parts sold by 360 Yield Center to attach the Y-DROP boom assembly to the sprayer manufacturer's boom. The SMP includes boom mounting brackets, top bracket plates, extension brackets, connectors, and any other hardware to complete an install. Every SMP has differing brackets, hardware, and kits as well as the correct number of such parts. 360 Yield Center will ensure your ordered package includes all parts necessary for a successful mount.**



- ▶ **Appendix A** (of the Technical guide) provides charts to be used in determining the correct system boom length. Simply find your model, # of rows, and row width (while considering the 1st fold boom size) which will provide you the correct boom length to find your OEM sprayer.
- ▶ Find the resulting system boom length in the Price Guide Sprayer Mount Package listing with applicable part number - all hardware and mounting part quantities are all included in a single SMP.
- ▶ Reminder: 360 Y-DROP™ Systems Can ONLY be Mounted on the 1st fold of any self-propelled sprayer.

## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



## Order a 360 Y-DROP™ System

### STEP 2 - Boom Assemblies

- ▶ **The 360 Y-DROP™ System's boom assembly comes in 5 foot sections that connect together with 8" connectors and hardware. The boom assembly provides a consistent boom for the attachment of the riser mounts. It takes several boom assemblies to fit the entire length of the OEM sprayer boom as noted below.**



- ▶ Quantity Needed: (calculated boom length in feet / 5) + 1  
Exception: 66' systems = (calculated boom length in feet / 5) + 2  
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or (60' / 5) + 1 = 13 boom assemblies
- ▶ Part number 415000 includes a single 5 foot boom section along with a connector and hardware.

### STEP 3 - Riser Mount Assemblies

- ▶ **The Riser Mount Assembly is the connector that attaches the Riser Tube to the system's Boom Assembly.**



- ▶ Quantity Needed: # of drops  
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 riser mounts.
- ▶ Part number 416000 includes connector and hardware.

## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



## Order a 360 Y-DROP™ System

---

### STEP 4 - Riser Mount Assemblies for Transport

- ▶ **Needed for placement of Y-drops (risers and base units) on the boom for reduced interference during transportation.**
- ▶ Quantity Needed: see chart below and refer to Appendix A for Calculated Boom Ft.
- ▶ Part number 416000 includes connector and hardware.

Calculated Boom Ft.	Recommended Qty
30-44 ft	none
51 ft	4
59 ft and greater	6

### STEP 5 - Breakaway Assemblies

- ▶ **Breakaway assembly provides the linkage between the riser mount and the riser tube that will allow for the entire YDROP unit to breakaway in those cases where the YDROP base unit will come into contact with the ground. This will allow for reduced stress on the Sprayer Mount Package and booms.**
- ▶ Quantity Needed: # of drops  
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 breakaway assemblies



## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.




## Order a 360 Y-DROP™ System

### STEP 6 - Riser Tubes

- ▶ **The Riser Tube is the long steel tube that attaches the 360 Y-DROP™ Base Unit to the system's Boom Assembly via the Riser Mount.**



- ▶ Quantity Needed: # of drops  
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 riser tubes
- ▶ Note: Some sprayer models sit higher in the center rows, requiring longer risers. It may be necessary to make a visual identification of the sprayer center to determine potential variability in riser sizes on the center section of the sprayer versus the outer boom heights. Refer to the chart on the next page for recommended riser lengths by sprayer model. See picture below:

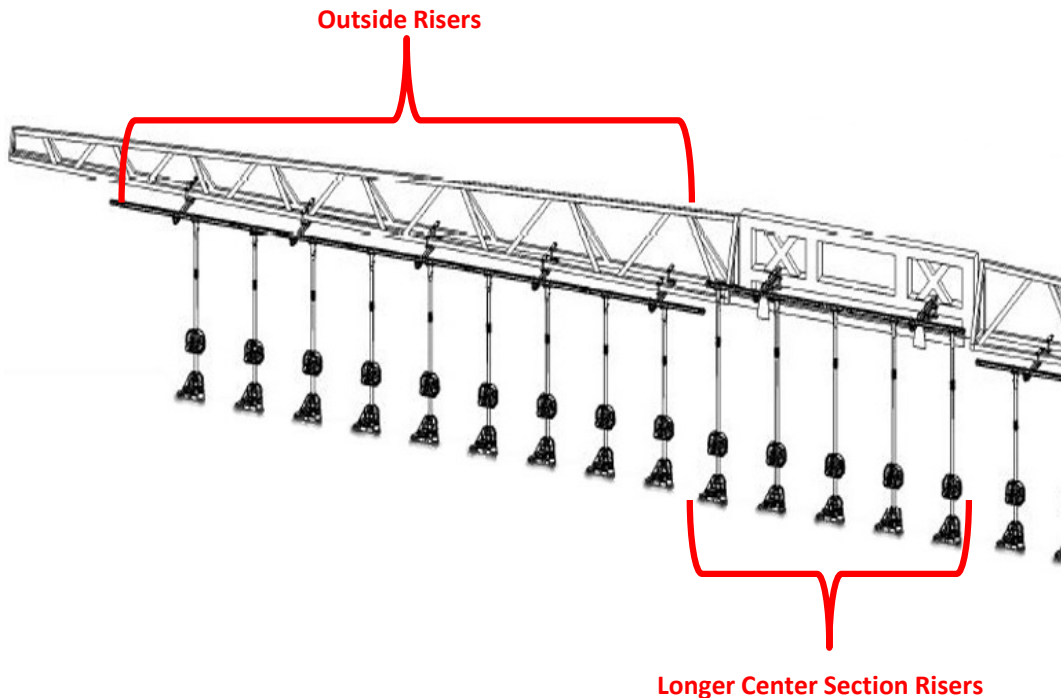

## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



### Order a 360 Y-DROP™ System

- ▶ The Riser length is now measured from the boom to the top of the 360 Y-DROP™ base unit. This is a more intuitive measurement of the actual riser rod itself. See illustration below for actual riser measurements and lengths.

#### Actual Riser Measurements & Lengths



- ▶ See charts below for old and new part numbers corresponding with Riser length, and recommended riser lengths by OEM Maker.

Comparison of Old and New Riser Part Numbers			
Old Part #	Old Stated Riser Length	New Part #	"New" Riser Length
416124	24 Inch	416043	43 Inch
n/a	n/a	416049	49 Inch
416136	36 Inch	416055	55 Inch
n/a	n/a	416061	61 Inch
416148	48 Inch	416067	67 Inch
416160	60 Inch	416079	79 Inch
416172	72 Inch	416091	91 Inch

Recommended Riser Tubes		
	Outside	Center
Apache	49"	49"
Rogator	49"	49"
Case	49"	49"
JD-R Series	55"	67"
JD - 4830/4730/4720	67"	55"
JD - 4930/4940	55"	49"
JD - 4710	55"	49"
JD - 4630	49"	49"
Hagie DTS 2016+	67"	67"
Hagie DTS pre-2016	61"	61"
Hagie STS & Aluminum	67"	67"
Miller-pre 08	67"	67"
Miller-2008+ **	67"	79" + 6" ext

\*\* - requires 6" extensions (# 416107) for center drops

## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



## Order a 360 Y-DROP™ System

### STEP 7 - Riser Hose Assemblies

- ▶ **The Riser Hose Assembly is the hose that liquid flows through from the OEM Sprayer lines to the 360 Y-DROP™ Base Units.**



- ▶ Quantity Needed: # of drops  
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 riser hose assemblies
- ▶ See chart below for the Riser Hoses corresponding with the Riser Tubes.

Riser Tube	Riser Hose Needed	Part Number
43" or 49"	90"	416090
55"	102"	416099
61" or 67"	114"	416110
79" or 91"	126"	416111

- ▶ Each part number includes a single hose with required connectors.
- ▶ For Case AIM systems, order adapters (416005) for the hose connection to the nozzle body. One adapter is needed for each hose.

## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



### Order a 360 Y-DROP™ System

#### STEP 8 - 360 Y-DROP™ Base Unit

► **The 360 Y-DROP™ Base Unit is the molded part at the bottom of the Riser Tube which runs through the field.**



- Quantity Needed: INSIDE ROWS: Conventional (Black): # of drops - 2  
Quantity Needed: OUTSIDE ROWS: High Visibility (Orange): 2  
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 drops.  
24 row system = 21 360 Y-DROP™ Conventional Base Units  
+ 2 360 Y-DROP™ High Visibility Base Units  
= 23 Total Base Units
- See chart below for the 360 Y-DROP™ Base Unit part numbers.

Part Number	360 Y-DROP™ Base Unit
413000	360 Y-DROP™ Base Unit - Conventional (Black)
413010	360 Y-DROP™ Base Unit - High Visibility (Orange)

- Each part number includes a single 360 Y-DROP™ Base Unit.



## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



## Order a 360 Y-DROP™ System

---

### STEP 9 - Drag Hoses

- ▶ **Two Drag Hoses (order singly) attach to each 360 Y-DROP™ Base Unit and precisely apply the liquid nitrogen or other product along the base of the stalk.**



- ▶ Quantity Needed: # of drops \* 2 hoses per 360 Y-DROP™.  
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 drops \* 2 = 46 drag hoses.
- ▶ See chart below for Drag Hoses offered for sale.

Part Number	Drag Hose Length
413124	24 Inch
413130	30 Inch
413136	36 Inch
413148	44 Inch

- ▶ Recommendation is that most systems will utilize the 30" hose.
- ▶ For Row widths greater than 30" or rough terrain, 36" drag hoses are suggested.
- ▶ Each part number includes a single drag hose and hose clamp.

## 360 Y-DROP™ Ordering Steps

These steps are intended to follow the steps in the Order & Retail Price Guide. This guide will provide the technical detail in having a successful 360 Y-DROP™ order placed with 360 Yield Center and should be used in conjunction with the 360 Y-DROP™ price guide.



### Order a 360 Y-DROP™ System

#### STEP 10 - Orifices/Nozzles (Optional)

- ▶ **Orifices or Nozzles are used in the base unit to control application rates during operation of the 360 Y-DROP™. Two orifices or nozzles are needed for each drop (one for each side or arm of the base unit).**



- ▶ Quantity needed: INSIDE ROWS: (# of drops \* 2) - 2  
Quantity needed: OUTSIDE ROWS: Two  
Ex: Sprayer Mount Pkg - JD R-Series 80, 90, 100' - 60 ft or 24 row system = 23 drops \* 2 = 46 total nozzles.  
24 row system = (23 drops \* 2) - 2 = 44 Inside orifices or nozzles  
+ 2 Outside orifices or nozzles  
= 46 Total orifices or nozzles
- ▶ See Appendix C for orifice selection based on targeted application rates and row spacing.
- ▶ See Appendix C or chart below for inside/outside row correlation for orifices. The outside orifice has a larger volume requirement due to outside rows being fed by one drag hose.

Double Rate Correlation Orifice Plate Sizes		
Inside Rows		Outside Rows
48	→	73
57	→	78
61	→	91
73	→	103
78	→	110
91	→	132

- ▶ If selecting Variable Rate Nozzles, refer to Appendix B for nozzle selection.
- ▶ After deciding on inside nozzle, reference chart below for corresponding outside nozzle. The outside nozzle has a larger volume requirement due to outside rows being fed by one drag house.

INSIDE Nozzle (Select in Appendix B)	OUTSIDE Nozzle (Selection Should Correspond to the Inside Nozzle as Below)
TDVRHB015	TDVRHB03
TDVRHB02	TDVRHB03
TDVRHB03	TDVRHB05

- ▶ Each part number includes a single orifice plate and corresponding rubber washer. In the case of variable rate nozzles, each part number includes a single variable rate nozzle.

Spacing	Rows	Calculated Boom Feet	Y-Drop Boom Category	
15	48	60	60	410506
20	36	60	60	410506
22	24	44	40	410504
22	32	59	60	410506
22	36	66	70	N/A
28	32	75	70	N/A
30	12	30	30	410503
30	16	40	40	410504
30	24	60	60	410506
30	32	80	70	N/A
38	12	38	40	410504
38	16	51	60	410506
38	24	76	70	N/A
				410517
				410686
				410666
				410526
				410536
				410546
				410556
				N/A
				410636
				410566
				410576
				410586
				410596
				410606
				410616
				410626
				410646
				410696

30 Inch Corn All Recommendations based on Water Specific Gravity												
USE THIS CHART INSIDE NOZZLE SELECTION - 30 INCH CORN												
TDVRF 015		Application Rate GPA at MPH Based on 15" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow											
PSI	GPM	5	6	7	8	9	10	11	12	13	14	15
20	0.174	13.8	11.5	9.8	8.6	7.7	6.9	6.3	5.7	5.3	4.9	4.6
30	0.266	21.1	17.6	15.0	13.2	11.7	10.5	9.6	8.8	8.1	7.5	7.0
40	0.350	27.7	23.1	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2
50	0.391	31.0	25.8	22.1	19.4	17.2	15.5	14.1	12.9	11.9	11.1	10.3
60	0.443	35.1	29.2	25.1	21.9	19.5	17.5	15.9	14.6	13.5	12.5	11.7
70	0.483	38.3	31.9	27.3	23.9	21.3	19.1	17.4	15.9	14.7	13.7	12.8
80	0.516	40.9	34.1	29.2	25.5	22.7	20.4	18.6	17.0	15.7	14.6	13.6
90	0.537	42.5	35.4	30.4	26.6	23.6	21.3	19.3	17.7	16.4	15.2	14.2
100	0.566	44.8	37.4	32.0	28.0	24.9	22.4	20.4	18.7	17.2	16.0	14.9
120	0.620	49.1	40.9	35.1	30.7	27.3	24.6	22.3	20.5	18.9	17.5	16.4
140	0.670	53.1	44.2	37.9	33.2	29.5	26.5	24.1	22.1	20.4	19.0	17.7
TDVRF 02		Application Rate GPA at MPH Based on 15" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow											
PSI	GPM	5	6	7	8	9	10	11	12	13	14	15
20	0.251	19.9	16.6	14.2	12.4	11.0	9.9	9.0	8.3	7.6	7.1	6.6
30	0.384	30.4	25.3	21.7	19.0	16.9	15.2	13.8	12.7	11.7	10.9	10.1
40	0.512	40.6	33.8	29.0	25.3	22.5	20.3	18.4	16.9	15.6	14.5	13.5
50	0.575	45.5	38.0	32.5	28.5	25.3	22.8	20.7	19.0	17.5	16.3	15.2
60	0.653	51.7	43.1	36.9	32.3	28.7	25.9	23.5	21.5	19.9	18.5	17.2
70	0.696	55.1	45.9	39.4	34.5	30.6	27.6	25.1	23.0	21.2	19.7	18.4
80	0.744	58.9	49.1	42.1	36.8	32.7	29.5	26.8	24.6	22.7	21.0	19.6
90	0.779	61.7	51.4	44.1	38.6	34.3	30.8	28.0	25.7	23.7	22.0	20.6
100	0.821	65.0	54.2	46.4	40.6	36.1	32.5	29.6	27.1	25.0	23.2	21.7
120	0.900	71.3	59.4	50.9	44.6	39.6	35.6	32.4	29.7	27.4	25.5	23.8
140	0.972	77.0	64.2	55.0	48.1	42.8	38.5	35.0	32.1	29.6	27.5	25.7
TDVRF 03		Application Rate GPA at MPH Based on 15" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow											
PSI	GPM	5	6	7	8	9	10	11	12	13	14	15
20	0.326	25.8	21.5	18.4	16.1	14.3	12.9	11.7	10.8	9.9	9.2	8.6
30	0.492	39.0	32.5	27.8	24.4	21.6	19.5	17.7	16.2	15.0	13.9	13.0
40	0.661	52.4	43.6	37.4	32.7	29.1	26.2	23.8	21.8	20.1	18.7	17.5
50	0.739	58.5	48.8	41.8	36.6	32.5	29.3	26.6	24.4	22.5	20.9	19.5
60	0.825	65.3	54.5	46.7	40.8	36.3	32.7	29.7	27.2	25.1	23.3	21.8
70	0.885	70.1	58.4	50.1	43.8	38.9	35.0	31.9	29.2	27.0	25.0	23.4
80	0.943	74.7	62.2	53.3	46.7	41.5	37.3	33.9	31.1	28.7	26.7	24.9
90	1.000	79.2	66.0	56.6	49.5	44.0	39.6	36.0	33.0	30.5	28.3	26.4
100	1.054	83.5	69.6	59.6	52.2	46.4	41.7	37.9	34.8	32.1	29.8	27.8
120	1.154	91.4	76.2	65.3	57.1	50.8	45.7	41.5	38.1	35.2	32.6	30.5
140	1.247	98.8	82.3	70.5	61.7	54.9	49.4	44.9	41.2	38.0	35.3	32.9
TDVRF 05		Application Rate GPA at MPH Based on 15" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow											
PSI	GPM	5	6	7	8	9	10	11	12	13	14	15
20	0.642	50.8	42.4	36.3	31.8	28.2	25.4	23.1	21.2	19.6	18.2	16.9
30	0.758	60.0	50.0	42.9	37.5	33.4	30.0	27.3	25.0	23.1	21.4	20.0
40	0.930	73.7	61.4	52.6	46.0	40.9	36.8	33.5	30.7	28.3	26.3	24.6
50	1.039	82.3	68.6	58.8	51.4	45.7	41.1	37.4	34.3	31.6	29.4	27.4
60	1.091	86.4	72.0	61.7	54.0	48.0	43.2	39.3	36.0	33.2	30.9	28.8
70	1.269	100.5	83.8	71.8	62.8	55.8	50.3	45.7	41.9	38.7	35.9	33.5
80	1.368	108.3	90.3	77.4	67.7	60.2	54.2	49.2	45.1	41.7	38.7	36.1
90	1.451	114.9	95.8	82.1	71.8	63.8	57.5	52.2	47.9	44.2	41.0	38.3
100	1.530	121.2	101.0	86.6	75.7	67.3	60.6	55.1	50.5	46.6	43.3	40.4
120	1.676	132.7	110.6	94.8	83.0	73.7	66.4	60.3	55.3	51.1	47.4	44.2
140	1.810	143.4	119.5	102.4	89.6	79.6	71.7	65.2	59.7	55.1	51.2	47.8

Most sprayers will allow lower application rates down to 15 PSI.

20 Inch Corn		All Recommendations based on Water Specific Gravity										
USE THIS CHART FOR INSIDE NOZZLE SELECTION - 20 INCH CORN												
TDVRF 015		Application Rate GPA at MPH Based on 10" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow	6	7	8	9	10	11	12	13	14	15	
PSI	GPM											
20	0.174	17.2	14.8	12.9	11.5	10.3	9.4	8.6	8.0	7.4	6.9	
30	0.266	26.3	22.6	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.5	
40	0.350	34.7	29.7	26.0	23.1	20.8	18.9	17.3	16.0	14.9	13.9	
50	0.391	38.7	33.2	29.0	25.8	23.2	21.1	19.4	17.9	16.6	15.5	
60	0.443	43.9	37.6	32.9	29.2	26.3	23.9	21.9	20.2	18.8	17.5	
70	0.483	47.8	41.0	35.9	31.9	28.7	26.1	23.9	22.1	20.5	19.1	
80	0.516	51.1	43.8	38.3	34.1	30.7	27.9	25.5	23.6	21.9	20.4	
90	0.537	53.2	45.6	39.9	35.4	31.9	29.0	26.6	24.5	22.8	21.3	
100	0.566	56.0	48.0	42.0	37.4	33.6	30.6	28.0	25.9	24.0	22.4	
120	0.620	61.4	52.6	46.0	40.9	36.8	33.5	30.7	28.3	26.3	24.6	
140	0.670	66.3	56.9	49.7	44.2	39.8	36.2	33.2	30.6	28.4	26.5	
TDVRF 02		Application Rate GPA at MPH Based on 10" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow	6	7	8	9	10	11	12	13	14	15	
PSI	GPM											
20	0.251	24.8	21.3	18.6	16.6	14.9	13.6	12.4	11.5	10.6	9.9	
30	0.384	38.0	32.6	28.5	25.3	22.8	20.7	19.0	17.5	16.3	15.2	
40	0.512	50.7	43.4	38.0	33.8	30.4	27.6	25.3	23.4	21.7	20.3	
50	0.575	56.9	48.8	42.7	38.0	34.2	31.1	28.5	26.3	24.4	22.8	
60	0.653	64.6	55.4	48.5	43.1	38.8	35.3	32.3	29.8	27.7	25.9	
70	0.696	68.9	59.1	51.7	45.9	41.3	37.6	34.5	31.8	29.5	27.6	
80	0.744	73.7	63.1	55.2	49.1	44.2	40.2	36.8	34.0	31.6	29.5	
90	0.779	77.1	66.1	57.8	51.4	46.3	42.1	38.6	35.6	33.1	30.8	
100	0.821	81.3	69.7	61.0	54.2	48.8	44.3	40.6	37.5	34.8	32.5	
120	0.900	89.1	76.4	66.8	59.4	53.5	48.6	44.6	41.1	38.2	35.6	
140	0.972	96.2	82.5	72.2	64.2	57.7	52.5	48.1	44.4	41.2	38.5	
TDVRF 03		Application Rate GPA at MPH Based on 10" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow	6	7	8	9	10	11	12	13	14	15	
PSI	GPM											
20	0.326	32.3	27.7	24.2	21.5	19.4	17.6	16.1	14.9	13.8	12.9	
30	0.492	48.7	41.7	36.5	32.5	29.2	26.6	24.4	22.5	20.9	19.5	
40	0.661	65.4	56.1	49.1	43.6	39.3	35.7	32.7	30.2	28.0	26.2	
50	0.739	73.2	62.7	54.9	48.8	43.9	39.9	36.6	33.8	31.4	29.3	
60	0.825	81.7	70.0	61.3	54.5	49.0	44.6	40.8	37.7	35.0	32.7	
70	0.885	87.6	75.1	65.7	58.4	52.6	47.8	43.8	40.4	37.5	35.0	
80	0.943	93.4	80.0	70.0	62.2	56.0	50.9	46.7	43.1	40.0	37.3	
90	1.000	99.0	84.9	74.3	66.0	59.4	54.0	49.5	45.7	42.4	39.6	
100	1.054	104.3	89.4	78.3	69.6	62.6	56.9	52.2	48.2	44.7	41.7	
120	1.154	114.2	97.9	85.7	76.2	68.5	62.3	57.1	52.7	49.0	45.7	
140	1.247	123.5	105.8	92.6	82.3	74.1	67.3	61.7	57.0	52.9	49.4	
TDVRF 05		Application Rate GPA at MPH Based on 10" Spacing (2 Nozzles Per YDROP)										
Pressure	Flow	6	7	8	9	10	11	12	13	14	15	
PSI	GPM											
20	0.642	63.6	54.5	47.7	42.4	38.1	34.7	31.8	29.3	27.2	25.4	
30	0.758	75.0	64.3	56.3	50.0	45.0	40.9	37.5	34.6	32.2	30.0	
40	0.930	92.1	78.9	69.1	61.4	55.2	50.2	46.0	42.5	39.5	36.8	
50	1.039	102.9	88.2	77.1	68.6	61.7	56.1	51.4	47.5	44.1	41.1	
60	1.091	108.0	92.6	81.0	72.0	64.8	58.9	54.0	49.9	46.3	43.2	
70	1.269	125.6	107.7	94.2	83.8	75.4	68.5	62.8	58.0	53.8	50.3	
80	1.368	135.4	116.1	101.6	90.3	81.3	73.9	67.7	62.5	58.0	54.2	
90	1.451	143.6	123.1	107.7	95.8	86.2	78.4	71.8	66.3	61.6	57.5	
100	1.530	151.5	129.8	113.6	101.0	90.9	82.6	75.7	69.9	64.9	60.6	
120	1.676	165.9	142.2	124.4	110.6	99.6	90.5	83.0	76.6	71.1	66.4	
140	1.810	179.2	153.6	134.4	119.5	107.5	97.7	89.6	82.7	76.8	71.7	

Most sprayers will allow lower application rates down to 15 PSI.

### Spraying Liquids with a Density other than Water

Since all tabulations we have computed are based on spraying water, which weighs 8.34 lbs per USA gallon (1 kilogram per liter) conversion factors must be used when spraying liquids that are heavier or lighter than water. To determine the proper size nozzle for the liquid to be sprayed, first multiply the desired GPM or GPA of liquid by the water rate conversion factor. Then use the new converted GPM or GPA rate to select the proper size nozzle.

#### Example:

Desired application rate is 20 GPA of 28% N. Determine the correct nozzle size as follows:

GPA (liquid other than water) x Conversion Factor  
= GPA

20 GPA (28%) x 1.13  
= 22.6 GPA (water)

The applicator should choose a nozzle size that will supply 22.6 GPA of water at the desired pressure.

Weight of Solution	Specific Gravity	Conversion Factor
7.0 lbs/gal.	.84	.92
8.0 lbs/gal.	.96	.88
8.34 lbs/gal.	1.00 - WATER	1.00
9.0 lbs/gal.	1.08	1.04
10.0 lbs/gal.	1.20	1.10
10.65 lbs/gal.	1.28 - 28% nitrogen	1.13
11.0 lbs/gal.	1.32	1.15
12.0 lbs/gal.	1.44	1.20
14.0 lbs/gal.	1.68	1.30

## Disk Orifice Rate Guidelines

1. It is assumed that a 360 Y-DROP™ unit is between every row on the system and the 360 Y-DROP units apply a band of nutrients to each side of the plant base.
2. Your specific sprayer's application pressure may not reach the entire range displayed in the orifice flow rate tables. Please be sure to take the capability of the specific sprayer into consideration prior to size selection.
3. When applying solutions other than UAN, application rates may vary due to product weight. Example - Ammonium Thiosulfate or Potassium Thiosulfate (**you will need to use the proper conversion factor based on that nutrient**).
4. To accommodate the fact that the outermost drag hoses only apply to one side of the row on most 360 Y-DROP systems, the outermost orifice plate will need to have double the capacity in order to apply a full rate to the row. The **Double Rate Correlation Table** below shows which orifice plates will need to be included for the outermost drag hose on each side of the sprayer.

Solution Properties		
Solution	Density of Solution lbs/gal.	Conversion Factor unitless
UAN (28%)	10.65	1.13
UAN (32%)	11.08	1.15
Water	8.34	1

Double Rate Correlation Orifice Plate Sizes		
Inside rows		Outside rows
48	→	73
57	→	78
61	→	91
73	→	103
78	→	110
91	→	132

### UAN Constants

- UAN (28%) - Weight per gallon 10.65 lbs @ 28% Nitrogen = **2.98 lbs N per gallon 28%**
- UAN (32%) - Weight per gallon 11.08 lbs @ 32% Nitrogen = **3.55 lbs N per gallon 32%**

#### EXAMPLE #1: Desire to apply 50 lbs Nitrogen using 32% UAN

$$\frac{50 \text{ (lbs N)}}{3.55 \text{ (lbs. N per gallon UAN 32\%)}} = \mathbf{14.08 \text{ GPA}}$$

- You would need to apply 14.08 GPA of product
- Based on 32% weight per gallon vs. water you MUST apply a conversion factor for accurate application:  
**14.08** (based on 32% UAN) × **1.15** (32% Conversion factor) = **16.19 GPA** (**this is the GPA you reference in the chart**).
- Utilize Rate Charts for Orifices or Variable Rate Nozzles attached - look at speed and rate range on charts based on 16.19 GPA to apply your target rate of 50 lbs N using 32% UAN (make sure to use chart based on your row spacing).

#### EXAMPLE #2: Desire to apply 50 lbs Nitrogen using 28% UAN

$$\frac{50 \text{ (lbs N)}}{2.98 \text{ (lbs. N per gallon UAN 28\%)}} = \mathbf{16.78 \text{ GPA}}$$

- You would need to apply 16.78 GPA of product
- Based on 28% weight per gallon vs. water you MUST apply a conversion factor for accurate application.  
**16.78** (Based on 28% UAN) × **1.13** (28% Conversion factor) = **18.96 GPA** (**this is the GPA you reference in the chart**).
- Utilize Rate Charts for Orifices or Variable Rate Nozzles attached - look at speed and rate range on charts based on 18.96 GPA to apply your target rate of 50 lbs N using 28% UAN (make sure to use chart based on your row spacing).

#### EXAMPLE #3: Desire to apply 40 GPA using 28% UAN

- Based on 28% weight per gallon vs. water you MUST apply a conversion factor for accurate application.  
**40** (GPA 28%) × **1.13** (28% Conversion factor) = **45.2 GPA** (**this is the GPA you reference in the chart**).
- Utilize Rate Charts for Orifices or Variable Rate Nozzles attached - look at speed and rate range on charts based on 45.2 GPA to apply your target rate of 40 GPA using 28% UAN (make sure to use chart based on your row spacing).

### Other Considerations

- For row widths other than 20" or 30" special consideration will need to be made to convert the rate tables into the correct values.
- Charts attached are made based on our recommended application of placing nutrients in a band on each side of the row. If application is only applied in a band on one side of the row, rate table values will need to be multiplied by two.

**Disk Orifice Rate Chart: 48**

Note: All table values must be converted from GPA<sub>(water)</sub> to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

**TABLE A**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 10" spacing (20" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.202</b>	40.0	30.0	24.0	20.0	17.1	15.0	13.3	12.0	10.9	10.0	9.2	8.6	8.0	7.5	7.1	6.7	6.0
<b>30</b>	<b>0.248</b>	49.1	36.8	29.5	24.6	21.0	18.4	16.4	14.7	13.4	12.3	11.3	10.5	9.8	9.2	8.7	8.2	7.4
<b>40</b>	<b>0.286</b>	56.6	42.5	34.0	28.3	24.3	21.2	18.9	17.0	15.4	14.2	13.1	12.1	11.3	10.6	10.0	9.4	8.5
<b>50</b>	<b>0.320</b>	63.4	47.5	38.0	31.7	27.2	23.8	21.1	19.0	17.3	15.8	14.6	13.6	12.7	11.9	11.2	10.6	9.5
<b>60</b>	<b>0.350</b>	69.3	52.0	41.6	34.7	29.7	26.0	23.1	20.8	18.9	17.3	16.0	14.9	13.9	13.0	12.2	11.6	10.4
<b>70</b>	<b>0.372</b>	73.7	55.3	44.2	36.8	31.6	27.6	24.6	22.1	20.1	18.4	17.0	15.8	14.7	13.8	13.0	12.3	11.1
<b>80</b>	<b>0.391</b>	77.3	58.0	46.4	38.7	33.1	29.0	25.8	23.2	21.1	19.3	17.8	16.6	15.5	14.5	13.6	12.9	11.6
<b>90</b>	<b>0.404</b>	79.9	60.0	48.0	40.0	34.3	30.0	26.6	24.0	21.8	20.0	18.4	17.1	16.0	15.0	14.1	13.3	12.0
<b>100</b>	<b>0.412</b>	81.5	61.1	48.9	40.8	34.9	30.6	27.2	24.5	22.2	20.4	18.8	17.5	16.3	15.3	14.4	13.6	12.2

**TABLE B**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 15" spacing (30" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.202</b>	26.7	20.0	16.0	13.3	11.4	10.0	8.9	8.0	7.3	6.7	6.2	5.7	5.3	5.0	4.7	4.4	4.0
<b>30</b>	<b>0.248</b>	32.7	24.6	19.6	16.4	14.0	12.3	10.9	9.8	8.9	8.2	7.6	7.0	6.5	6.1	5.8	5.5	4.9
<b>40</b>	<b>0.286</b>	37.8	28.3	22.7	18.9	16.2	14.2	12.6	11.3	10.3	9.4	8.7	8.1	7.6	7.1	6.7	6.3	5.7
<b>50</b>	<b>0.320</b>	42.2	31.7	25.3	21.1	18.1	15.8	14.1	12.7	11.5	10.6	9.7	9.1	8.4	7.9	7.5	7.0	6.3
<b>60</b>	<b>0.350</b>	46.2	34.7	27.7	23.1	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2	7.7	6.9
<b>70</b>	<b>0.372</b>	49.1	36.8	29.5	24.6	21.1	18.4	16.4	14.7	13.4	12.3	11.3	10.5	9.8	9.2	8.7	8.2	7.4
<b>80</b>	<b>0.391</b>	51.6	38.7	30.9	25.8	22.1	19.3	17.2	15.5	14.1	12.9	11.9	11.0	10.3	9.7	9.1	8.6	7.7
<b>90</b>	<b>0.404</b>	53.3	40.0	32.0	26.6	22.8	20.0	17.8	16.0	14.5	13.3	12.3	11.4	10.7	10.0	9.4	8.9	8.0
<b>100</b>	<b>0.412</b>	54.3	40.8	32.6	27.2	23.3	20.4	18.1	16.3	14.8	13.6	12.5	11.6	10.9	10.2	9.6	9.1	8.2

\*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

\*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

\*Values within +/-5% of actual



**Disk Orifice Rate Chart: 57**

Note: All table values must be converted from GPA<sub>(water)</sub> to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

**TABLE A**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 10" spacing (20" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	<b>0.283</b>	56.0	42.0	33.6	28.0	24.0	21.0	18.7	16.8	15.3	14.0	12.9	12.0	11.2	10.5	9.9	9.3	8.4
30	<b>0.346</b>	68.5	51.4	41.1	34.3	29.4	25.7	22.8	20.6	18.7	17.1	15.8	14.7	13.7	12.8	12.1	11.4	10.3
40	<b>0.400</b>	79.2	59.4	47.5	39.6	33.9	29.7	26.4	23.8	21.6	19.8	18.3	17.0	15.8	14.9	14.0	13.2	11.9
50	<b>0.447</b>	88.5	66.4	53.1	44.3	37.9	33.2	29.5	26.6	24.1	22.1	20.4	19.0	17.7	16.6	15.6	14.8	13.3
60	<b>0.490</b>	97.0	72.8	58.2	48.5	41.6	36.4	32.3	29.1	26.5	24.3	22.4	20.8	19.4	18.2	17.1	16.2	14.6
70	<b>0.522</b>	103.4	77.5	62.0	51.7	44.3	38.8	34.5	31.0	28.2	25.8	23.9	22.2	20.7	19.4	18.2	17.2	15.5
80	<b>0.549</b>	108.8	81.6	65.3	54.4	46.6	40.8	36.3	32.6	29.7	27.2	25.1	23.3	21.8	20.4	19.2	18.1	16.3
90	<b>0.570</b>	112.9	84.7	67.7	56.4	48.4	42.3	37.6	33.9	30.8	28.2	26.0	24.2	22.6	21.2	19.9	18.8	16.9
100	<b>0.584</b>	115.6	86.7	69.4	57.8	49.5	43.3	38.5	34.7	31.5	28.9	26.7	24.8	23.1	21.7	20.4	19.3	17.3

**TABLE B**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 15" spacing (30" Rows)																
PSI	GPM	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
20	<b>0.283</b>	37.4	28.0	22.4	18.7	16.0	14.0	12.5	11.2	10.2	9.3	8.6	8.0	7.5	7.0	6.6	6.2	5.6
30	<b>0.346</b>	45.7	34.3	27.4	22.8	19.6	17.1	15.2	13.7	12.5	11.4	10.5	9.8	9.1	8.6	8.1	7.6	6.9
40	<b>0.400</b>	52.8	39.6	31.7	26.4	22.6	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.6	9.9	9.3	8.8	7.9
50	<b>0.447</b>	59.0	44.3	35.4	29.5	25.3	22.1	19.7	17.7	16.1	14.8	13.6	12.6	11.8	11.1	10.4	9.8	8.9
60	<b>0.490</b>	64.7	48.5	38.8	32.3	27.7	24.3	21.6	19.4	17.6	16.2	14.9	13.9	12.9	12.1	11.4	10.8	9.7
70	<b>0.522</b>	68.9	51.7	41.4	34.5	29.5	25.8	23.0	20.7	18.8	17.2	15.9	14.8	13.8	12.9	12.2	11.5	10.3
80	<b>0.549</b>	72.5	54.4	43.5	36.3	31.1	27.2	24.2	21.8	19.8	18.1	16.7	15.5	14.5	13.6	12.8	12.1	10.9
90	<b>0.570</b>	75.2	56.4	45.1	37.6	32.2	28.2	25.1	22.6	20.5	18.8	17.4	16.1	15.0	14.1	13.3	12.5	11.3
100	<b>0.584</b>	77.1	57.8	46.2	38.5	33.0	28.9	25.7	23.1	21.0	19.3	17.8	16.5	15.4	14.4	13.6	12.8	11.6

\*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

\*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

\*Values within +/-5% of actual

**Disk Orifice Rate Chart: 61**

Note: All table values must be converted from GPA<sub>(water)</sub> to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

**TABLE A**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 10" spacing (20" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.330</b>	65.3	49.0	39.2	32.7	28.0	24.5	21.8	19.6	17.8	16.3	15.1	14.0	13.1	12.3	11.5	10.9	9.8
<b>30</b>	<b>0.404</b>	80.0	60.0	48.0	40.0	34.3	30.0	26.7	24.0	21.8	20.0	18.5	17.1	16.0	15.0	14.1	13.3	12.0
<b>40</b>	<b>0.466</b>	92.3	69.2	55.4	46.1	39.5	34.6	30.8	27.7	25.2	23.1	21.3	19.8	18.5	17.3	16.3	15.4	13.8
<b>50</b>	<b>0.521</b>	103.2	77.4	61.9	51.6	44.2	38.7	34.4	30.9	28.1	25.8	23.8	22.1	20.6	19.3	18.2	17.2	15.5
<b>60</b>	<b>0.571</b>	113.1	84.8	67.8	56.5	48.5	42.4	37.7	33.9	30.8	28.3	26.1	24.2	22.6	21.2	20.0	18.8	17.0
<b>70</b>	<b>0.613</b>	121.3	91.0	72.8	60.7	52.0	45.5	40.4	36.4	33.1	30.3	28.0	26.0	24.3	22.7	21.4	20.2	18.2
<b>80</b>	<b>0.658</b>	130.3	97.7	78.2	65.1	55.8	48.9	43.4	39.1	35.5	32.6	30.1	27.9	26.1	24.4	23.0	21.7	19.5
<b>90</b>	<b>0.701</b>	138.8	104.1	83.3	69.4	59.5	52.0	46.3	41.6	37.8	34.7	32.0	29.7	27.8	26.0	24.5	23.1	20.8
<b>100</b>	<b>0.741</b>	146.8	110.1	88.1	73.4	62.9	55.0	48.9	44.0	40.0	36.7	33.9	31.4	29.4	27.5	25.9	24.5	22.0

**TABLE B**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 15" spacing (30" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.330</b>	43.6	32.7	26.1	21.8	18.7	16.3	14.5	13.1	11.9	10.9	10.1	9.3	8.7	8.2	7.7	7.3	6.5
<b>30</b>	<b>0.404</b>	53.3	40.0	32.0	26.7	22.9	20.0	17.8	16.0	14.5	13.3	12.3	11.4	10.7	10.0	9.4	8.9	8.0
<b>40</b>	<b>0.466</b>	61.5	46.1	36.9	30.8	26.4	23.1	20.5	18.5	16.8	15.4	14.2	13.2	12.3	11.5	10.9	10.3	9.2
<b>50</b>	<b>0.521</b>	68.8	51.6	41.3	34.4	29.5	25.8	22.9	20.6	18.8	17.2	15.9	14.7	13.8	12.9	12.1	11.5	10.3
<b>60</b>	<b>0.571</b>	75.4	56.5	45.2	37.7	32.3	28.3	25.1	22.6	20.6	18.8	17.4	16.2	15.1	14.1	13.3	12.6	11.3
<b>70</b>	<b>0.613</b>	80.9	60.7	48.5	40.4	34.7	30.3	27.0	24.3	22.1	20.2	18.7	17.3	16.2	15.2	14.3	13.5	12.1
<b>80</b>	<b>0.658</b>	86.8	65.1	52.1	43.4	37.2	32.6	28.9	26.1	23.7	21.7	20.0	18.6	17.4	16.3	15.3	14.5	13.0
<b>90</b>	<b>0.701</b>	92.5	69.4	55.5	46.3	39.6	34.7	30.8	27.8	25.2	23.1	21.3	19.8	18.5	17.3	16.3	15.4	13.9
<b>100</b>	<b>0.741</b>	97.8	73.4	58.7	48.9	41.9	36.7	32.6	29.4	26.7	24.5	22.6	21.0	19.6	18.3	17.3	16.3	14.7

\*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

\*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

\*Values within +/-5% of actual

**Disk Orifice Rate Chart: 73**

Note: All table values must be converted from GPA<sub>(water)</sub> to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

**TABLE A**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 10" spacing (20" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.467</b>	92.5	69.3	55.5	46.2	39.6	34.7	30.8	27.7	25.2	23.1	21.3	19.8	18.5	17.3	16.3	15.4	13.9
<b>30</b>	<b>0.572</b>	113.3	84.9	68.0	56.6	48.5	42.5	37.8	34.0	30.9	28.3	26.1	24.3	22.7	21.2	20.0	18.9	17.0
<b>40</b>	<b>0.660</b>	130.7	98.0	78.4	65.3	56.0	49.0	43.6	39.2	35.6	32.7	30.2	28.0	26.1	24.5	23.1	21.8	19.6
<b>50</b>	<b>0.738</b>	146.1	109.6	87.7	73.1	62.6	54.8	48.7	43.8	39.9	36.5	33.7	31.3	29.2	27.4	25.8	24.4	21.9
<b>60</b>	<b>0.808</b>	160.0	120.0	96.0	80.0	68.6	60.0	53.3	48.0	43.6	40.0	36.9	34.3	32.0	30.0	28.2	26.7	24.0
<b>70</b>	<b>0.852</b>	168.8	126.6	101.3	84.4	72.3	63.3	56.3	50.6	46.0	42.2	38.9	36.2	33.8	31.6	29.8	28.1	25.3
<b>80</b>	<b>0.901</b>	178.4	133.8	107.0	89.2	76.5	66.9	59.5	53.5	48.7	44.6	41.2	38.2	35.7	33.4	31.5	29.7	26.8
<b>90</b>	<b>0.941</b>	186.3	139.7	111.8	93.1	79.8	69.9	62.1	55.9	50.8	46.6	43.0	39.9	37.3	34.9	32.9	31.0	27.9
<b>100</b>	<b>0.972</b>	192.4	144.3	115.5	96.2	82.5	72.2	64.1	57.7	52.5	48.1	44.4	41.2	38.5	36.1	34.0	32.1	28.9

**TABLE B**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 15" spacing (30" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.467</b>	61.6	46.2	37.0	30.8	26.4	23.1	20.5	18.5	16.8	15.4	14.2	13.2	12.3	11.6	10.9	10.3	9.2
<b>30</b>	<b>0.572</b>	75.5	56.6	45.3	37.8	32.4	28.3	25.2	22.7	20.6	18.9	17.4	16.2	15.1	14.2	13.3	12.6	11.3
<b>40</b>	<b>0.660</b>	87.1	65.3	52.3	43.6	37.3	32.7	29.0	26.1	23.8	21.8	20.1	18.7	17.4	16.3	15.4	14.5	13.1
<b>50</b>	<b>0.738</b>	97.4	73.1	58.4	48.7	41.7	36.5	32.5	29.2	26.6	24.4	22.5	20.9	19.5	18.3	17.2	16.2	14.6
<b>60</b>	<b>0.808</b>	106.7	80.0	64.0	53.3	45.7	40.0	35.6	32.0	29.1	26.7	24.6	22.9	21.3	20.0	18.8	17.8	16.0
<b>70</b>	<b>0.852</b>	112.5	84.4	67.5	56.3	48.2	42.2	37.5	33.8	30.7	28.1	26.0	24.1	22.5	21.1	19.9	18.8	16.9
<b>80</b>	<b>0.901</b>	118.9	89.2	71.4	59.5	51.0	44.6	39.6	35.7	32.4	29.7	27.4	25.5	23.8	22.3	21.0	19.8	17.8
<b>90</b>	<b>0.941</b>	124.2	93.1	74.5	62.1	53.2	46.6	41.4	37.3	33.9	31.0	28.7	26.6	24.8	23.3	21.9	20.7	18.6
<b>100</b>	<b>0.972</b>	128.3	96.2	77.0	64.1	55.0	48.1	42.8	38.5	35.0	32.1	29.6	27.5	25.7	24.1	22.6	21.4	19.2

\*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

\*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

\*Values within +/-5% of actual

**Disk Orifice Rate Chart: 78**

Note: All table values must be converted from GPA<sub>(water)</sub> to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

**TABLE A**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 10" spacing (20" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.544</b>	107.7	80.8	64.6	53.9	46.2	40.4	35.9	32.3	29.4	26.9	24.9	23.1	21.5	20.2	19.0	18.0	16.2
<b>30</b>	<b>0.667</b>	132.1	99.0	79.2	66.0	56.6	49.5	44.0	39.6	36.0	33.0	30.5	28.3	26.4	24.8	23.3	22.0	19.8
<b>40</b>	<b>0.770</b>	152.5	114.3	91.5	76.2	65.3	57.2	50.8	45.7	41.6	38.1	35.2	32.7	30.5	28.6	26.9	25.4	22.9
<b>50</b>	<b>0.861</b>	170.5	127.9	102.3	85.2	73.1	63.9	56.8	51.1	46.5	42.6	39.3	36.5	34.1	32.0	30.1	28.4	25.6
<b>60</b>	<b>0.943</b>	186.7	140.0	112.0	93.4	80.0	70.0	62.2	56.0	50.9	46.7	43.1	40.0	37.3	35.0	32.9	31.1	28.0
<b>70</b>	<b>0.999</b>	197.9	148.4	118.7	98.9	84.8	74.2	66.0	59.4	54.0	49.5	45.7	42.4	39.6	37.1	34.9	33.0	29.7
<b>80</b>	<b>1.061</b>	210.0	157.5	126.0	105.0	90.0	78.8	70.0	63.0	57.3	52.5	48.5	45.0	42.0	39.4	37.1	35.0	31.5
<b>90</b>	<b>1.113</b>	220.4	165.3	132.3	110.2	94.5	82.7	73.5	66.1	60.1	55.1	50.9	47.2	44.1	41.3	38.9	36.7	33.1
<b>100</b>	<b>1.157</b>	229.0	171.8	137.4	114.5	98.2	85.9	76.3	68.7	62.5	57.3	52.9	49.1	45.8	42.9	40.4	38.2	34.4

**TABLE B**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 15" spacing (30" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.544</b>	71.8	53.9	43.1	35.9	30.8	26.9	23.9	21.5	19.6	18.0	16.6	15.4	14.4	13.5	12.7	12.0	10.8
<b>30</b>	<b>0.667</b>	88.0	66.0	52.8	44.0	37.7	33.0	29.3	26.4	24.0	22.0	20.3	18.9	17.6	16.5	15.5	14.7	13.2
<b>40</b>	<b>0.770</b>	101.6	76.2	61.0	50.8	43.6	38.1	33.9	30.5	27.7	25.4	23.5	21.8	20.3	19.1	17.9	16.9	15.2
<b>50</b>	<b>0.861</b>	113.7	85.2	68.2	56.8	48.7	42.6	37.9	34.1	31.0	28.4	26.2	24.4	22.7	21.3	20.1	18.9	17.0
<b>60</b>	<b>0.943</b>	124.5	93.4	74.7	62.2	53.3	46.7	41.5	37.3	33.9	31.1	28.7	26.7	24.9	23.3	22.0	20.7	18.7
<b>70</b>	<b>0.999</b>	131.9	98.9	79.1	66.0	56.5	49.5	44.0	39.6	36.0	33.0	30.4	28.3	26.4	24.7	23.3	22.0	19.8
<b>80</b>	<b>1.061</b>	140.0	105.0	84.0	70.0	60.0	52.5	46.7	42.0	38.2	35.0	32.3	30.0	28.0	26.3	24.7	23.3	21.0
<b>90</b>	<b>1.113</b>	147.0	110.2	88.2	73.5	63.0	55.1	49.0	44.1	40.1	36.7	33.9	31.5	29.4	27.6	25.9	24.5	22.0
<b>100</b>	<b>1.157</b>	152.7	114.5	91.6	76.3	65.4	57.3	50.9	45.8	41.6	38.2	35.2	32.7	30.5	28.6	26.9	25.4	22.9

\*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

\*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

\*Values within +/-5% of actual

**Disk Orifice Rate Chart: 91**

Note: All table values must be converted from GPA<sub>(water)</sub> to the specific solution GPA flow rate with equations listed on Disk Orifice Plate Guidelines (1st pg of Appendix C)

**TABLE A**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 10" spacing (20" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.739</b>	146.3	109.7	87.8	73.2	62.7	54.9	48.8	43.9	39.9	36.6	33.8	31.4	29.3	27.4	25.8	24.4	21.9
<b>30</b>	<b>0.905</b>	179.2	134.4	107.5	89.6	76.8	67.2	59.7	53.8	48.9	44.8	41.4	38.4	35.8	33.6	31.6	29.9	26.9
<b>40</b>	<b>1.050</b>	207.9	155.9	124.7	104.0	89.1	78.0	69.3	62.4	56.7	52.0	48.0	44.6	41.6	39.0	36.7	34.7	31.2
<b>50</b>	<b>1.170</b>	231.7	173.7	139.0	115.8	99.3	86.9	77.2	69.5	63.2	57.9	53.5	49.6	46.3	43.4	40.9	38.6	34.7
<b>60</b>	<b>1.280</b>	253.4	190.1	152.1	126.7	108.6	95.0	84.5	76.0	69.1	63.4	58.5	54.3	50.7	47.5	44.7	42.2	38.0
<b>70</b>	<b>1.356</b>	268.4	201.3	161.0	134.2	115.0	100.6	89.5	80.5	73.2	67.1	61.9	57.5	53.7	50.3	47.4	44.7	40.3
<b>80</b>	<b>1.442</b>	285.6	214.2	171.3	142.8	122.4	107.1	95.2	85.7	77.9	71.4	65.9	61.2	57.1	53.5	50.4	47.6	42.8
<b>90</b>	<b>1.518</b>	300.6	225.4	180.3	150.3	128.8	112.7	100.2	90.2	82.0	75.1	69.4	64.4	60.1	56.4	53.0	50.1	45.1
<b>100</b>	<b>1.583</b>	313.5	235.1	188.1	156.7	134.3	117.5	104.5	94.0	85.5	78.4	72.3	67.2	62.7	58.8	55.3	52.2	47.0

**TABLE B**

Press.	Flow	GPA <sub>(Water)</sub> at MPH based on 15" spacing (30" Rows)																
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20
<b>20</b>	<b>0.739</b>	97.5	73.2	58.5	48.8	41.8	36.6	32.5	29.3	26.6	24.4	22.5	20.9	19.5	18.3	17.2	16.3	14.6
<b>30</b>	<b>0.905</b>	119.5	89.6	71.7	59.7	51.2	44.8	39.8	35.8	32.6	29.9	27.6	25.6	23.9	22.4	21.1	19.9	17.9
<b>40</b>	<b>1.050</b>	138.6	104.0	83.2	69.3	59.4	52.0	46.2	41.6	37.8	34.7	32.0	29.7	27.7	26.0	24.5	23.1	20.8
<b>50</b>	<b>1.170</b>	154.4	115.8	92.7	77.2	66.2	57.9	51.5	46.3	42.1	38.6	35.6	33.1	30.9	29.0	27.3	25.7	23.2
<b>60</b>	<b>1.280</b>	169.0	126.7	101.4	84.5	72.4	63.4	56.3	50.7	46.1	42.2	39.0	36.2	33.8	31.7	29.8	28.2	25.3
<b>70</b>	<b>1.356</b>	178.9	134.2	107.4	89.5	76.7	67.1	59.6	53.7	48.8	44.7	41.3	38.3	35.8	33.5	31.6	29.8	26.8
<b>80</b>	<b>1.442</b>	190.4	142.8	114.2	95.2	81.6	71.4	63.5	57.1	51.9	47.6	43.9	40.8	38.1	35.7	33.6	31.7	28.6
<b>90</b>	<b>1.518</b>	200.4	150.3	120.2	100.2	85.9	75.1	66.8	60.1	54.7	50.1	46.2	42.9	40.1	37.6	35.4	33.4	30.1
<b>100</b>	<b>1.583</b>	209.0	156.7	125.4	104.5	89.6	78.4	69.7	62.7	57.0	52.2	48.2	44.8	41.8	39.2	36.9	34.8	31.3

\*All GPA table values are based on applying water into air at atmospheric pressure. Refer to **Disk Orifice Plate Guidelines (1st pg of Appendix C)** for conversion rates.

\*The outlined sections in tables A & B represent application rates for a realistic speed and pressure range.

\*Values within +/-5% of actual